



## PRECISION MEASURING TOOLS

### Dial Test Indicators

Horizontal | Inch | Ø32mm/Ø1.26" Diameter



- Graduation: 0.0001"; 0.001"; 0.0005"
- Jeweled bearings
- Inch unit comes with Ø3/8" dovetail stem
- Metric unit comes with Ø8mm dovetail stem
- Easy to read face
- Ruby contact point
- Short form calibration certificate included

0.008"

 Graduation: 0.0001"  
Dial Reading: 0-4-0  
Accuracy: ±0.0001"  
Code 910056

158.16

0.03"

 Graduation: 0.001"  
Dial Reading: 0-15-0  
Accuracy: ±0.001"  
Code 910057

90.75

0.03"

 Graduation: 0.0005"  
Dial Reading: 0-15-0  
Accuracy: ±0.0005"  
Code 910058

118.68

### Magnetic Base Stands



910064

 176.37lbf/80kgf  
Code 910064

30.91

910065

 176.37lbf/80kgf  
Code 910065

28.63

 176.37lbf/80kgf  
Code 910067

74.91

 220.46lbf/100kgf  
Code 910066

88.23

- Accepts test indicators with dovetail clamping mechanism
- Dial gauges can be held by the 3/8" or 8mm diameter stem or by the lug backing plate
- The rotary knob switches magnet on or off
- The precision surfaces and the bottom V are securely fastened to the ferrous work-piece or machine table when the rotary knob is in the on position
- 910065 with Fine Adjustment

 For more details see [www.KAR.ca](http://www.KAR.ca) - Promotions - SPI 32 page Brochure


SHORT FORM CALIBRATION CERTIFICATE INCLUDED WITH MOST SPI TOOLS

SPI		Certificate of Calibration
		Result of inspection
Product Name	Digital Depth Microscope	Measuring length
Part Number	10430271	Permissible values
Serial Number	231047029	±
Range	0 - 4"	Deviation
Resolution	0.00001"	
Inspection Standard	ASME B89.1.13	
Traceable to NIST No.	440-0-0000034036-21	
Inspector By		

Best-in-the-Industry 2-Year Warranty

Offer valid from September 1 to October 31, 2025

YOUR AUTHORIZED KAR DISTRIBUTOR:


 Email: [sales@omnitoool.ca](mailto:sales@omnitoool.ca)

Toll Free: 1-800-265-3541

Tel: (519) 622-3065 | Fax: (519) 622-3270

[www.omnitoool.ca](http://www.omnitoool.ca)

284 Pinebush Road Unit 1, Cambridge ON N1T 1Z6

## Miniature Electronic Protractor




- This protractor provides an immediate digital reading of any angle in a full circle with 0°-90°-0°-90°-0° readings
- The machined Aluminum frame is rigid and light with a precise platform that allows the sensor and its microprocessor circuit to provide high accuracy throughout the entire 360° range
- Four 90° quadrants for display purposes
- Calibrates in minutes without any special fixtures
- Buttons: on/off, zero
- Battery: AAA

4 x 90°  
Resolution: 0.1°  
Accuracy: ±0.2°  
Code 910068

**92.58**

## Electronic Protractors

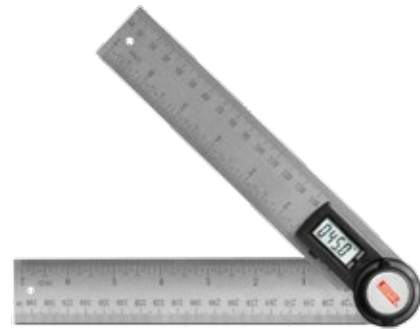

- Graduation of blade: 1mm and 1/32"
- Buttons: on/off, zero
- With clamping screw to lock the blades
- Made of stainless steel
- Automatic power off
- Battery: CR2032

0-360° | 8"  
Resolution: 0.1°  
Accuracy: ±0.3°  
Code 910071

**74.94**

0-360° | 12"  
Resolution: 0.1°  
Accuracy: ±0.3°  
Code 910072

**57.56**

## Electronic Edge Finders



- The shank is electrically conducted to the metal workpiece through the chuck and table, the LED lights up and the beeper sounds (only for 910076), when the ball touches the workpiece
- Not suitable for rotary use
- Hardened shank and contact ball
- Battery: Alkaline LRI

Shank: 3/4"  
Contact: 0.4"  
Accuracy: 0.0002"  
Code 910075

**126.54**

Shank: 3/4" with Beeper  
Contact: 0.4"  
Accuracy: 0.0002"  
Code 910076

**157.90**

## Telescoping Gauges



- Spring-loaded plunger expands within the bore (or groove), allowing determination of the internal diameter
- With a knurled clamp

5/16"-6"/8mm-150mm  
Quantity: 6pcs - A, B, C, D, E, F  
Code 910174

**49.61**

Offer valid from September 1 to October 31, 2025



## Electronic LEEB Hardness Testers



Printer included

- Impact Device D
- Large screen (5 inches), showing all functions and parameters with background light
- Hardness test can be taken at any angle including inverted
- A wide measuring range supports the hardness of all metallic materials. Hardness results are directly displayed in HRB, HRC, HV, HB, HSD, HL, Mpa hardness scales
- Supports a variety of Richter sensors (DC, DL, C, D+15, G)
- Memory stores 500 records
- Tolerance alarm function
- Wireless printing capability
- Automatic power off after five minutes
- Battery: Lithium-ion, rechargeable
- Printer included
- Short form calibration certificate included

170-960HLD  
Accuracy:  $\pm 5\text{HLD}$   
Code 910074

1792.46



SPI QUALITY INDICATORS ARE PERFECT  
TOOLS FOR PRECISE MEASUREMENTS



For more details see [www.KAR.ca](http://www.KAR.ca)  
Promotions - SPI 32 page Brochure



**KAR Industrial Inc.**  
[www.kar.ca](http://www.kar.ca)

Toronto.....1-800-387-3127  
Montréal.....1-800-363-7862  
Edmonton.....1-866-440-4326

Offer valid September 1 to October 31, 2025  
\*Products shown may not be exactly as illustrated

MAKING IT EASY TO DO BUSINESS WITH SINCE 1954... [CONTACT YOUR LOCAL KAR DISTRIBUTOR TODAY!](#)