



Email: sales@omnitool.ca Toll Free: 1-800-265-3541

Tel: (519) 622-3065 | Fax: (519) 622-3270

www.omnitool.ca

284 Pinebush Road Unit 1, Cambridge ON N1T 1Z6

# **M**itutoyo











Small Tool Instruments and Data Management

Form Measurement

Digital Scales and DRO Systems

**Sensor Systems** 

Test Equipment

**Optical Measurement** 

# FALL PROMO 2025

PRECISION TOOLS & INSTRUMENTS

Effective October 1st through December 23rd





## **M**itutoyo





#### **Dear Valued Customers,**

I want to thank you for your continued support of the Mitutoyo product and our team members in operations around the world. This has been a busy and interesting year for all of us at Mitutoyo Canada. We have worked closely with our factory and development staff to continue to expand our product lineup and overall capability with new products and enhancements to some tools that have been a part of our brand for many years.

In addition, in North America, we have continued to expand programs to provide support and re-sources to you, your team and the supply chain we all depend on. One example of these programs is our educational content that will help you support new employees or skill development for existing staff when new challenges are faced. You will find access to these programs from our main website (Mitutoyo.ca). Look under the "About Us" tab and then click on "Training & Education." While on the website, you may also look up our calibration and repair programs. You may be surprised to also find new services offered such as contract inspection and contract part programming. I hope that you explore these programs and reach out to one of the Mitutoyo Canada team members or valued distributor partners for more information.

The 2025 Mitutoyo Fall Promotion discounts on the most commonly used tools and instruments you will find in shops all around the country. We hope this promotion will support your year-end and future needs with valuable packages and discounts.

Once again, I thank you for your continued support of Mitutoyo-made measuring solutions.

Sincerely

#### Matt Dye

President, Mitutoyo America Corporation and Mitutoyo

Matthew B. Syc



### **TABLE OF CONTENTS**

NEW	MDE QuantuMike3
Products	The new MDE QuantuMike delivers faster measurements - up to 4x faster than standard micrometers - with exceptional accuracy ( $\pm 1~\mu m$ permissible error), an IP65 protection rating, and a user-friendly design with enhanced display.
<b>NEW</b> Products	<b>Surftest SJ-220</b>
<b>NEW</b> Products	<b>ID-C/ID-F Digimatic Indicators</b>
Products	<b>Dial Test Indicators</b>
NEW Products	Profile Projectors
Products	LH-600F Linear Height Gages

QuantuMike	3
Surftest SJ-220 Packages	4
Tool Kits	6
Indicators	8
Dial Test Indicators	9
Bore Gages	12
Holtest	13
Borematic	15
Profile Projectors	16
Quick Image	18
LH-600F Height Gage	20
QM Height Gage	22
Calipers/Caliper Checker	<b>2</b> 4
Micrometers	26
U-WAVE Bluetooth® Wireless	
Data Transmitters	28
U-WAVE Wireless	
Data Transmitters	
Litematic Units	
Linear Gages/EJ Counters	
Digimatic Scale Units	
Linear Encoders	
Hardness Testers	34
Microscopes	38



#### **New Features**

- > GO/NO-GO icons: at-a-glance verification
- > Calibration date alerts: warning and due date alerts
- > Approach Speed Warning: reduce over-torquing
- > Calculation: auto-calculate corrections and more
- >S1 Digimatic output send measurement to Excel or easily program features with software (ITPak 3.0 or MeasurLink®)
- > Auto power On/Off. Key customization

#### **Continued Great Features**

- > 4x faster spindle speed
- > Preset, Zero, Hold, Function Lock, Error display
- > 1-pc Rachet Thimble + Speeder
- > Resolution: .00005" / 0.001mm
- > Accuracy: +/- .00005" / 0.001mm

#### **GO/NG icons**

Displays tolerance judgment mark Tolerance judgment function: ON



#### Auto-calculate

Calculates and displays correction value


Calculation function: ON Correction value can be read directly



Customized key setting allows the user to easily switch between measurement values and calculation results with the press of a button.

# **Calibration alerts** Forewarning Calendar icon flashes Due date Entire display flashes

Comparison of time needed to measure a 6-stepped workpiece (with one hand) ■Measuring time ■Positioning time



\*According to Mitutoyo's comparison test data



Order No.	Description	List	Promo
293-180-40	QUANTUMIKE MICROMETER, DIGIMATIC, 0-1", IP65, .00005", W/SPC	\$406.25	\$385.94
293-181-40	QUANTUMIKE MICROMETER, DIGIMATIC, 1-2", IP65, .00005", W/SPC	\$465.00	\$441.75
293-182-40	QUANTUMIKE MICROMETER, DIGIMATIC, 2-3", IP65, .00005", W/SPC	\$554.00	\$526.30
293-183-40	QUANTUMIKE MICROMETER, DIGIMATIC, 3-4", IP65, .00005", W/SPC	\$605.00	\$574.75



## Surftest

All prices are in Canadian Dollars



Expand functionality by linking with a smartphone, etc.



Connectable and convenient. High-speed transmission of measurement data. Significantly strengthened communication







#### **USB** communication for sending and receiving measurement data

Bidirectional communication is possible by connecting the SJ-220 to a PC with a USB cable and installing the dedicated app "SJ-Communication-Tool".

Measurement work can be made more efficient by setting measurement conditions on the PC.

\*The USB connector also serves as a charging port.





#### Dedicated app "SJ-App" for increased efficiency of measurement work

The dedicated app that enables communication with the SJ-220 is equipped with various functions to increase work efficiency. It is also possible to manage data, create inspection reports, and export to CSV and PDF files on the terminal.





Startup screen

Calculation result



Inspection report







Can be downloaded from the Mitutoyo website.


Download site URL

https://www2.mitutoyo.co.jp/eng/contact/products/SJ-App/ Android 12 or later, Bluetooth® 5.0 compatible (Android only)

#### Added convenience by linking to PC with highly functional free software, "SJ-Communication-Tool"

We provide free software that allows you to import various data (measurement conditions, parameter settings, calculation results, measurement data) from the SJ-220 to create and edit inspection reports on your PC. This software can significantly reduce the time it takes to create reports.





Confirmed operation environments

- OS: Windows 10 (64 bit), Windows 11 (64 bit)
- \* Windows is a product of Microsoft Corporation.
- \* Connection requires a USB 2.0 Cable or a Wireless Unit for Measuring Instrument U-WAVE-TIB-



PC-linked software "SJ-Communication-Tool"





Can be downloaded from the Mitutovo website

https://www2.mitutoyo.co.jp/eng/contact/products/SJ-Communication-Tool Windows 10/11, Bluetooth® 5.0 compatible (Windows only)

#### **Surftest SJ-220 Packages**

**MeasurLink**° ENABLED

- > NEW 2.8" color touch screen makes navigation and measuring condition settings easier to perform.
- > The built-in battery charges via USB Type-C has approximately 1,000 measurements on a full charge (4 hours charging time).
- > Performs roughness analysis conforming to international standards JIS '82 / JIS '94 / JIS '01 / ISO '97 /ANSI/VDA including ISO21920.
- > Optional MicroSD card can store up to 500 measurement conditions, 10,000 measurement results and 500 image data.
- > New [HOME] key lets the operator easily recall frequently used calibration and measurement conditions.



#### **ASK US ABOUT OUR SJ-220 ELEARNING COURSE**

#### Wireless connectivity now available for increased measurement data



With Wireless Unit for Measuring Instrument U-WAVE-TIB installed



10:34 1 ≜ 🗄		% 2/ B
	SJ220-00001	
23K30006		
ISO 4287:1997	R	GAUSS
0.5 mm/s	λc 0.8 mm	×5
Ra		GO
	0.0	<b>20</b> μm
Rq		+NG
	<b>0.0</b>	III'
Ra W		

Order No.	Description	List	Promo
178-741-13	Surftest SJ-220 Standard drive unit type 0.75mN inch	\$3,829.00	\$3,638.00
178-742-13	Surftest SJ-220 Standard drive unit type 4mN inch	\$3,829.00	\$3,638.00
178-744-13	Surftest SJ-220 R-Drive unit type 4mN inch	\$4,508.00	\$4,283.00
12AAA221	Adapter, Magnetic Stand, Dia. 8mm	\$65.00	\$48.75
178-069	Stand, SJ-210/310/410	\$1,456.00	\$1,412.00
178-390	Detector, Standard, 4MN, SJ	\$650.00	\$487.50
264-628	WIRELESS UNIT FOR MEASURING INST U-WAVE-TIB	\$410.00	\$390.00
12AAA233	Adapter, Height Gauge, 1/4" X 1/2"	\$147.00	\$125.00
570-413	Height Gauge, Digimatic, Absolute Linear Encoder 0-18", .0005" / 0-450mm, 0.01mm	\$1,383.00	\$1,313.85



12AAA233



12AAA233 12AAA221




178-390



www.mitutoyo.ca

#### **Soft Case Tool Kits**

**Durable Protective Cases** 



Empty cases are also available as a new home for your existing tools!





64PKA288A



**RUGGED, IMPACT-RESISTANT BUILD** 

CASE MOULDS FOR DIGIMATIC AND MECHANICAL TOOLS

LONG-LIFE ZIPPERS AND STAIN-RESISTANT COVER

2X MAGNET-BACKED SLOTS FOR HOLDING STEEL RULES, SPANNERS, THUMB DRIVES AND MORE





Prices effective October 1 through December 23, 2025





64PKA284



6/DK V 285

#### Soft Case Tool Kit Components for 64PKA283

Part #	Description
103-135	MIC, OUTSIDE, 0-1", 0.0001", FRICTION THIMBLE
182-204	STEEL RULE 6" 3R FLEXIBLE
505-742J	DIAL CALIPER, 6", .1"/ REV
64PMT183	CASE FOR MECHANICAL TOOL KIT

#### Soft Case Tool Kit Components for 64PKA284

Part #	Description
103-177	MIC, OUTSIDE, 0-1", 0.001", RATCHET STOP
182-102	STEEL RULE 6" 16R RIGID
505-740J	DIAL CALIPER, 6", .2"/ REV
64PMT183	CASE FOR MECHANICAL TOOL KIT

#### Soft Case Tool Kit Components for 64PKA285

Part #	Description
293-340-30	1" RATCHET STOP MICROMETER (NO SPC)
500-196-30	DIGIMATIC CALIPER, 6"/150MM, NO OUTPUT
64PMT182	CASE FOR DIGIMATIC TOOL KIT



64PKA286



64PKA288A

#### Soft Case Tool Kit Components for 64PKA286

Part #	Description
293-348-30	1" FRICTION THIMBLE MICROMETER (NO SPC)
500-196-30	DIGIMATIC CALIPER, 6"/150MM, NO OUTPUT
64PMT182	CASE FOR DIGIMATIC TOOL KIT

#### Soft Case Tool Kit Components for 64PKA288A

Part #	Description
293-180-40	QUANTUMIKE MICROMETER, DIGIMATIC, 0-1", IP65, .00005", W/ SPC
500-171-30	DIGIMATIC CALIPER, 6"/150MM, W/ OUTPUT
64PMT182	CASE FOR DIGIMATIC TOOL KIT

#### **Soft Case Tool Packages**

Package #	Description	List	Promo
64PKA283	TOOL PKG, MECHANICAL, INCH, W/ 6" DIAL CALIPER, 1" OUTSIDE MIC, 6" STEEL RULE, CASE	\$444.00	\$399.60
64PKA284	TOOL PKG, MECHANICAL, INCH, W/ 6" DIAL CALIPER, 1" MIC, 6" STEEL RULE, CASE	\$375.00	\$337.50
64PKA285	TOOL PKG, DIGIMATIC, INCH, W/ 1" MIC (RATCHET STOP TYPE), 6" CALIPER, CASE	\$558.00	\$502.20
64PKA286	TOOL PKG, DIGIMATIC, INCH, W/ 1" MIC (FRICTION THIMBLE TYPE), 6" CALIPER, CASE	\$565.00	\$508.50
64PKA288A	TOOL PKG, DIGIMATIC, INCH, W/1" QUANTUMIKE, 6" CALIPER, CASE, WITH OUTPUT	\$739.25	\$665.33

#### **Protective Case Only**

Package #	Description	List	Promo
64PMT182	CASE FOR DIGIMATIC TOOL KIT	\$74.00	\$66.60
64PMT183	CASE FOR MECHANICAL TOOL KIT	\$77.00	\$69.30






#### **ID-C/ID-F Digimatic Indicators**

High-performance ABS Digimatic Indicators

> 20 µinch/0.5 µm resolution.

> Large screen and analog bar.

> Calibration period notification function. The LCD displays an icon to notify the user when the set calibration time approaches. This facilitates the proper precision management of ID-C/ID-F.



> Simple Calculation Function.

> New Digimatic S1 Output\*. S1 is the new Mitutoyo bidirectional output format that enables reading and writing information to the gages such as sending a zero command, TIR reset, calibration date warnings, and the ability to poll the serial number for smoother measurement operation. Communication is supported by the new Input Tool and SPC cable, see table below.

Order No.	Description	List
06AGL011	SPC DIGIMATIC Cable, TYPE S1 (1M)	\$98.00
264-020	USB INPUT TOOL	\$285.00

06AGL011 264-020

Excel®

Send data directly into existing forms


ITPak 3.0 Freeware
Read/Write Data and set Parameters

MeasurLink® 10.4 (see page 29)
Data Management & SPC Software



#### Large screen and analog bar

The units have large screens that can display various information in an easy-to-read manner. They also have an analog bar, convenient for observing subtle movements such as the approach to tolerance.



#### **ID-C Series - Battery Operated**

\* SPC Cable and Input Tool are both required

Order No.				Maximu	ım Permissib	le Error	Massuring		Net mass (g)				
With Lug	Flat Back	Range	Resolution	MPE <sub>E</sub>	Hysteresis MPE <sub>H</sub>	Repeatability MPE <sub>R</sub>	Measuring for MPL (N)	Interface	With Lug	Flat Back	List	Promo	
543-702	543-702B	0.5" / 12.7mm	0.00002" / .00005" / 0.0001" / 0.0005" / 0.0005mm / 0.001mm / 0.01mm	± 0.00012" / 0.002mm			1.5 or less	d1/d2/S1	195	165	\$626.25	\$563.63	
543-707	543-707B	0.5" / 12.7mm			0.002mm 0.00008"	0.00000" /	/ 0.00008" / 0.002mm	0.4 to 0.7	d1/d2/S1	190	160	\$939.00	\$845.10
-	543-722B	1" / 25.4mm				0.00008 / 0.002mm		1.8 or less	d1/d2/S1	-	195	\$671.00	\$603.90
-	543-732B	2" / 50.8mm		± 0.0002" / 0.005mm			2.3 or less	d1/d2/S1	-	260	\$1,050.00	\$945.00	
543-712	543-712B	0.5" / 12.7mm					0.9 or less	d1/S1	190	160	\$438.00	\$394.20	
543-717	543-717B	0.5" / 12.7mm		± 0.001" / 0.02mm	0.001" /	0.0005" /	0.2 to 0.5	d1/S1	185	155	\$613.00	\$551.70	
-	543-727B	1" / 25.4mm	0.0005" / 0.01mm	0.0211111	0.001 / 0.02mm		1.8 or less	d1/S1	-	190	\$671.00	\$603.90	
-	543-737B	2" / 50.8mm		± 0.0015" / 0.04mm			2.3 or less	d1/S1	-	245	\$880.00	\$792.00	

#### ID-F Series - AC Powered - Green/Red Backlit Display

Order No.				Maximum Pe	rmissible Err	or	Mossuring			
With Lug	Flat Back	Range	Resolution	MPE <sub>E</sub>	Hysteresis MPE <sub>H</sub>	Repeatability MPE <sub>R</sub>	for MPL (N)	Interface	List	Promo
543-856-A	543-856B-A	0.5" / 12.7mm	0.005mm / 0.001mm /	± 0.0001" / 0.0025mm	0.00008" / 0.002mm	0.00008" / 0.002mm	1.5 or less	d1/d2/S1	\$675.00	\$607.50
-	543-852A	1" / 25.4mm	0.003111117 0.001111117 0.01 mm / 0.00002" /				1.8 or less	d1/d2/S1	\$1,008.00	\$978.00
-	543-854A	2" / 50.8mm	.00005" / 0.0001" /	± 0.00016" / 0.004mm			2.3 or less	d1/d2/S1	\$1,147.00	\$1,090.00
-	543-858A	2 / 30.811111	0.0005"/ 0.001" (selectable)	± 0.00012" / 0.003mm			2.3 or less	d1/d2/S1	\$1,095.00	\$1,062.00

#### **Dial Test Indicators**




#### .000050" / 50µinch model now available!

- >One-piece movement assembly for improved durability & impact resistance.
- > Contact point length shown on dial face.
- > Certificate of Inspection included.
- > Shows results from both measuring directions.
- > Resilient crystal with high resistance to glare, scratches and impact.

Mitutoyo
10 - ADE IN JAPAN INC.
UNS853
15 0.01mm
10 513-424-10 20
25
Contact point length is printed on dial face

Contact point length is printed on dial face to avoid accuracy issues

#### **Set Configuration**

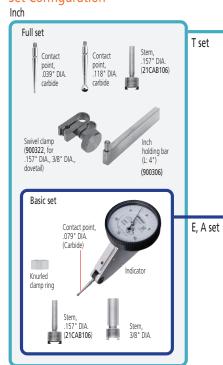

Full set	
Swivel clamp (900321, for ø4nm, ø8mm, dovetail)  Metric (L: 100 (9002)	
Plus set	A set
	m, mm CAB106) C set (ø 6 Sterr
Basic set	
Contact point, e2mm (Carbide)	E set
Knurled Stem, ø8mm damp ring (Set No. 902804)	<b>H set</b> (ø 6 Stem

Part #	Range	Graduations	Set Type	Face Color	List	Promo	Remarks
Standa	rd						
513-407-10E	.008"	.00005"	Basic	White	\$264.00	\$237.60	Fine grads
513-407-10T	.008"	.00005"	Full	White	\$310.00	\$279.00	Fine grads
513-401-10E	.14mm	0.001mm	Basic	Yellow	\$314.00	\$282.60	
513-402-10E	.03"	.0005"	Basic	White	\$173.00	\$155.70	
513-402-10T	.03"	.0005"	Full	White	\$194.00	\$174.60	
513-403-10E	.008"	.0001"	Basic	White	\$201.00	\$180.90	
513-403-10T	.008"	.0001"	Full	White	\$281.00	\$252.90	
513-404-10E	0.8mm	0.01mm	Basic	Yellow	\$187.00	\$168.30	
513-404-10A	0.8mm	0.01mm	Plus	Yellow	\$206.00	\$185.40	
513-404-10T	0.8mm	0.01mm	Full	Yellow	\$220.00	\$198.00	
513-405-10E	0.2mm	0.002mm	Basic	Yellow	\$208.00	\$187.20	
513-405-10T	0.2mm	0.002mm	Full	Yellow	\$271.00	\$243.90	
513-406-10E	.03"/0.7mm	.0005"/0.01mm	Basic	White/Yellow	\$216.00	\$194.40	Dual dial
513-406-10T	.03"/0.7mm	.0005"/0.01mm	Full	White/Yellow	\$239.00	\$215.10	Dual dial
513-409-10E	0.2mm/.0076"	0.002mm/.0001"	Basic	Yellow/White	\$277.00	\$249.30	Dual dial
513-409-10T	0.2mm/.0076"	0.002mm/.0001"	Full	Yellow/White	\$282.00	\$253.80	Dual dial
513-412-10E	.03"	.0005"	Basic	White	\$264.00	\$237.60	
513-412-10T	.03"	.0005"	Full	White	\$304.00	\$273.60	
513-415-10E	1.0mm	0.01mm	Basic	Yellow	\$199.00	\$179.10	Long stylus
513-415-10H	1.0mm	0.01mm	Basic	Yellow	\$217.00	\$195.30	Long stylus
Ruby Tip							
513-472-10E	.03"	.0005"	Basic	White	\$206.00	\$185.40	
513-479-10E	.03"	.0005"	Basic	White	\$217.00	\$195.30	Long stylus
Standa	ord (20° tilted fac	ce)					
513-442-10A	.06"	.0005"	Basic	White	\$249.00	\$224.10	
513-442-10T	.06"	.0005"	Full	White	\$282.00	\$253.80	
513-442-16A	.06"	.0005"	Basic	Black	\$249.00	\$224.10	
513-442-16T	.06"	.0005"	Full	Black	\$282.00	\$253.80	
513-446-16A	.06"	.0005"	Basic	Black	\$333.00	\$299.70	Long stylus
513-446-16T	.06"	.0005"	Full	Black	\$376.00	\$338.40	Long stylus
513-446-10A	.06"	.0005"	Basic	White	\$333.00	\$299.70	Long stylus
513-446-10T	.06"	.0005"	Full	White	\$376.00	\$338.40	Long stylus
513-443-10A	.016"	.0001"	Basic	White	\$314.00	\$282.60	
513-443-10T	.016"	.0001"	Full	White	\$356.00	\$320.40	
Vertical	dial is on the to	op of the frame					
513-452-10E	.03"	.0005"	Basic	White	\$238.00	\$214.20	
513-452-10T	.03"	.0005"	Full	White	\$264.00	\$237.60	
513-453-10E	.008"	.0001"	Basic	White	\$284.00	\$255.60	
Parallel:	dial is on the si	de of the frame					
513-485-10E	0.2mm	0.002mm	Basic	Yellow	\$304.00	\$273.60	

#### **Calculation-Type Digimatic Indicator ID-C**

- > Calculation-type Digimatic Indicator features both a key lock and parameter lock.
- > Fast measurement frequency up to 50 per second.
- > An analog bar provides easy-to-read values when scanning for Max, Min and TIR Values.
- > Improved parameter setting software makes it even easier to set all of the available parameters to determine and upload the proper coefficients for calculation. (optional) 21EZA313
- > The ABSOLUTE Digimatic indicator performs internal calculations using the formula Ax+B+Cx-1 (assuming spindle displacement as x), while the specified

coefficients A, B and C can be set with respect to the purpose of measurement or dimensions of the fixtures. This unique feature allows for reading measurements directly without searching for conversions.











Order No.	Resolution	Range	Accuracy	Measuring Force	List	Promo
543-342B-10	.00005/.0001/.0005" (0.001/0.01mm) Selectable	.5"/12.7mm	±.00010"/0.003mm	1.5N or less	\$653.00	\$587.70

Stem dia. 3/8" #4-48 UNF Thread

SPC cable - 1m: 905338 2m: 905409

Installed on

optional bore gage probe (page 12)

#### **Bore Gage ABSOLUTE Digimatic Indicator ID-C**

- > Hold automatically picks up hole diameter after a
- > Bore Gage Digimatic Indicator features both a key lock and parameter lock.
- > Fast measurement frequency up to 50 per second.
- > Analog bar provides easy-to-read values when scanning for Max, Min and TIR values.
- > Up to three sets of master values and upper/lower tolerance values can be stored.

- > GO/NO-GO judgment
- > Employing the ABSOLUTE linear encoder, the ID-C always displays the spindle ABSOLUTE Position from the origin at power-on.
- > Improved parameter setting software makes it even easier to set all of the available parameters to determine and upload the proper coefficients for calculation. (optional) 21EZA313



SPC cable - 1m: 905338 2m: 905409



#### **Peak Hold ABSOLUTE Digimatic Indicator ID-C**

With Max./Min. Value Holding Function

- > Peak Hold Digimatic Indicator features both a Key Lock and Parameter Lock.
- > An analog bar provides easy-to-read values when scanning for Max, Min and TIR Values.
- > GO/NO-GO judgment
- > The maximum, minimum or runout value can be displayed during measurement.
- > Fast measurement frequency up to 50 per second.
- > Employing the ABSOLUTE linear encoder, the Signal ID-C always displays the spindle ABSOLUTE Position from the origin at power-on.
- > Improved parameter setting software makes it even easier to set all of the available parameters and then determine and upload the proper coefficients for calculation. (optional) 21EZA313

Order No.	Resolution	Range	Accuracy	Remarks	List	Promo					
Stem dia. 3/8", #4-48 UNF Thread											
543-302-10	.00005/.0001/.0005" 0.001/0.01mm	.5"/12.7mm	±.00010"/0.003mm	w/lug	\$629.00	\$534.65					
543-302B-10	Selectable	.5"/12.7mm	±.00010"/0.003mm	Flat-back	\$629.00	\$534.65					

SPC cable - 1m: 905338 2m: 905409



543-312B-10



#### **Digimatic Indicator ID-H**

Remote Programming Capable

- > This digital indicator offers excellent accuracy and functionality with an easy-to-read display. Take advantage of its high accuracy, backed up by 0.5µm / .00002" resolution, remote control functionality via a handheld controller (or an RS-232C interface) and easy runout measurements with the analog bar display.
- > With RS-232C input/output

- > The maximum, minimum or runout value can be displayed during measurement.
- > GO/NO-GO judgment is performed by setting the upper and lower tolerances. If a judgment result is out of tolerance, the display backlighting changes from green to red, so tolerance judgment can be made at a glance.

0.0015mm

0.0025mm



SPC cable - 1m: 936937 2m: 965014

\$1,125.00

\$1,340.10

\$1,250.00

\$1,489.00

#### .00002", .00005", .0001", 0.0005mm, 0.001mm 543-564A

Stem dia. 3/8" #4-48 UNF Thread

Order No.

543-562A

#### **ABSOLUTE Digimatic Indicator ID-S**

> Employing the ABSOLUTE linear encoder, the ID-S always displays the spindle ABSOLUTE Position from the origin at power-on. Also, unlimited response speed eliminates overspeed errors.

1.2" / 30.4mm

2.4" / 60.9mm

ID-H530E

ID-H560E

- > Dust/water protection level: IP42 (IP53: 543-796B-10).
- > SPC data output





Order No.	Resolution	Range	Accuracy	Measuring force	Remarks	List	Promo
Stem dia. 3/8", #-	4-48 UNF Thread						
543-792-10	.00005"/0.001mm	.5" / 12.7mm	±.0001"	1.5N or less	w/ lug back	\$388.00	\$349.20
543-796-10	.00005"/0.001mm	.5" / 12.7mm	±.0001"	2.5N or less	w/ lug-back	\$427.00	\$384.30
543-793-10	.0001"/0.001mm	.5" / 12.7mm	±.0001"	1.5N or less	w/ lug back	\$388.00	\$349.20
543-783-10	.0005"/0.01mm	.5" / 12.7mm	±.0010"	1.5N or less	w/ lug-back	\$250.00	\$225.00
543-792B-10	.00005"/0.001mm	.5" / 12.7mm	±.0001"	1.5N or less	w/ flat back	\$388.00	\$349.20
543-796B-10	.00005"/0.001mm	.5" / 12.7mm	±.0001"	2.5N or less	w/ flat-back	\$462.00	\$415.80
543-793B-10	.00005"/0.001mm	.5" / 12.7mm	±.0001"	1.5N or less	w/ flat back	\$388.00	\$349.20
543-783B-10	.0005"/0.01mm	.5" / 12.7mm	±.0010"	1.5N or less	w/ flat-back	\$250.00	\$225.00

#### **ABSOLUTE Digimatic Indicator ID-U**

- > Economical, Slim digital indicator.
- > Large LCD and simple key operation.
- > Ideal for installation into measuring devices because of its compact design and long battery life.
- > Employing the ABSOLUTE linear encoder, the ID-U always displays the spindle ABSOLUTE position from the origin at power-on. Also, unlimited response speed eliminates overspeed errors.
- > Long stem for mounting.

Order No.	Resolution	Range	Model	Accuracy	Measuring force	List	Promo			
575-123	.0005"/0.01mm	1" / 25.4mm	ID-U1025E	.0008"	1.8N or less	\$276.00	\$248.40			
	CDC vible 4 v 005220 2 v 005400									

SPC cable - 1m: 905338 2m: 905409



# Dial Indicators / Bore Gages

All prices are in Canadian Dollars

#### **Series Two Dial Indicators**

- > Improved impact- and oil-resistant materials are employed in the bezel. The improved shape of the crystal face helps with easier measurement readings.
- > High-strength, heat-treated stainless steel spindles for longevity.
- > Scratch- and chemical-resistant hard-coated crystals.
- > Increased rigidity in the bearing plate for reducing the retracing error (20%), and 4-screw mounting for greater impact resistance.
- > Inspection certificate included.
- > No through screw-holes on the frame for high oil- and dust-resistance. The bezel clamp (optional) can be attached either to the right or left side.



Revolutionary stem-bushing design for trouble-free stem clamping (longer clamping range; maximum tightening torque at the clamping point with M5 screw: 150N•cm).



Order No.	Graduation	Range	Range/Rev	Type	Dial Reading	Accuracy First 2.5 Rev/Overall	Force	List	Promo
2358A-10*	.0001"	.5"	.01"	w/lug	0-10	.0001 / .0008	2.0N or less	\$313.00	\$281.70
2803A-10*	.0001"	.025"	.01"	w/lug	0-5-0	.0001 / .0001	2.5N or less	\$227.00	\$204.30
2416A-10*	.001"	1"	.1"	w/lug	0-100	.001 / .002	1.8N or less	\$176.00	\$158.40
2424A-19*	.001"	2"	1"	w/lug	0-100	.001 / .003	2.5N or less	\$343.00	\$308.70
2776A	.0005"	1"	.05"	w/lug	0-50	.0005 / .002	2.5N or less	\$179.00	\$161.10

<sup>\*</sup>Jeweled bearing model

#### **Bore Gages**

- > Carbide-tipped contact points for durability.
- > The dial indicator is fully protected by a rugged cover.
- > Optional extension rods can be attached for measuring deep holes.
- > The grip minimizes the variation of measurements by reducing heat transfer from the operator's hand.



Order No.	Range	Graduation	Anvils	Spacers	List	Promo					
With Indicato	r										
511-751-20	.7 - 1.4"		9	2	\$524.00	\$471.60					
511-752-20	1.4 - 2.5"	.0001" (2923B-10)	6	4	\$576.00	\$518.40					
511-753-20	2.0 - 6.0"		11 (2" sub anvil)	4	\$565.00	\$508.50					
511-754-20	4.0 - 6.5"		13	4	\$840.00	\$756.00					
511-755-20	6.5 - 10"		6	7	\$925.00	\$832.50					
511-756-20	10 - 16"		5 (3" sub anvil)	7	\$1,099.00	\$989.10					
Without Indic	Without Indicator										
511-731	.7 - 1.4"		9	2	\$370.00	\$333.00					
511-732	1.4 - 2.5"	Indicator	6	4	\$380.00	\$342.00					
511-733	2.0 - 6.0"	optional	11 (2" sub anvil)	4	\$410.00	\$369.00					
511-734	4.0 - 6.5"	Protective Cover optional	13	4	\$613.00	\$551.70					
511-735	6.5 - 10"	(21DZA000)	6	7	\$719.00	\$647.10					
511-736	10 - 16"		5 (3" sub anvil)	7	\$903.00	\$812.70					





See Digimatic indicators made specifically for bore gages (page 10).

#### **Holtest**

- > Titanium-coated measuring pins provide excellent durability and impact resistance while allowing the instrument to measure close to the bottom of blind holes.
- > Three-point design ensures self-centering action for stable measurements in the range above .275" bore diameter.
- > With ratchet stop for consistent force.

#### **Holtest Type II**

> Holtest Type II models are also available. These lower-costs units have solid, hardened alloy steel anvils.

#### Mechanical Holtests - Individual Units

Order No.	Description/Range	List	Promo
368-021	Holtest, 0.08" - 0.1"	\$2,113.00	\$1,690.40
368-022	Holtest, 0.1" - 0.12"	\$2,113.00	\$1,690.40
368-023	Holtest, 0.12" - 0.16"	\$1,705.00	\$1,364.00
368-024	Holtest, 0.16" - 0.2"	\$1,705.00	\$1,364.00
368-025	Holtest, 0.2" - 0.24"	\$1,705.00	\$1,364.00
368-026	Holtest, 0.24" - 0.28"	\$1,705.00	\$1,364.00
368-261	Holtest, 0.275" - 0.35"	\$844.00	\$675.20
368-262	Holtest, 0.35" - 0.425"	\$844.00	\$675.20
368-263	Holtest, 0.425" - 0.5"	\$844.00	\$675.20
368-264	Holtest, 0.5" - 0.65"	\$874.00	\$699.20
368-265	Holtest, 0.65" - 0.8"	\$874.00	\$699.20
368-266	Holtest, 0.8" - 1.0"	\$909.00	\$727.20
368-267	Holtest, 1.0" - 1.2"	\$909.00	\$727.20
368-268	Holtest, 1.2" - 1.6"	\$1,135.00	\$908.00
368-269	Holtest, 1.6" - 2.0"	\$1,197.00	\$957.60
368-270	Holtest, 2.0" - 2.5"	\$1,204.00	\$963.20
368-271	Holtest, 2.5" - 3.0"	\$1,307.00	\$1,045.60
368-272	Holtest, 3.0" - 3.5"	\$1,343.00	\$1,074.40
368-273	Holtest, 3.5" - 4.0"	\$1,405.00	\$1,124.00
368-274	Holtest, 4.0" - 5.0"	\$1,803.00	\$1,442.40
368-275	Holtest, 5.0" - 6.0"	\$2,043.00	\$1,634.40
368-276	Holtest, 6.0" - 7.0"	\$2,099.00	\$1,679.20
368-277	Holtest, 7.0" - 8.0"	\$2,169.00	\$1,735.20
368-278	Holtest, 8.0" - 9.0"	\$2,465.00	\$1,972.00
368-279	Holtest, 9.0" - 10"	\$2,762.00	\$2,209.60
368-280	Holtest, 10" - 11"	\$2,789.00	\$2,231.20
368-281	Holtest, 11" - 12"	\$2,860.00	\$2,288.00

#### Mechanical Holtests – Complete Unit Sets

Order No.	Description/Range	List	Promo
368-916	Holtest, Set, 0.275" - 0.5"*	\$3,114.00	\$2,491.20
368-917	Holtest, Set, 0.5" - 0.8"*	Holtest, Set, 0.5" - 0.8"* \$2,099.00	
368-918	Holtest, Set, 0.8" - 2.0"*	\$4,804.00	\$3,843.20
368-919	Holtest, Set, 2.0" - 4.0"* \$6,847.00		\$5,477.60
368-920	Holtest, Set, 4.0" - 8.0"*	\$10,479.00	\$8,383.20
368-926	Holtest, 2pc Set, .08"12"*	\$4,493.00	\$3,594.40
368-927	Holtest, 4pc Set, .12"28"*	\$7,170.00	\$5,736.00








#### Measuring Deep Holes

An extension tube (optional accessory) can be fitted to enable measurement of deep holes.

#### Measuring a Blind Hole

The measuring contact points held in the jaws permit measuring the diameter of a blind hole to the bottom.

( up to 100mm / 4" models)



Range	a	b	С
6 - 12mm / .2755"	2	_	2.5
12 - 20mm / .58"	0.3	5.6	3.5
20 - 30mm / .8 - 1.2"	0.3	8.3	5.2
30 - 50mm / 1.2 - 2"	0.3	13	10
50 - 100mm / 2 - 4"	0.3	17	14
100 - 300mm / 4 - 12"	12.4	21	13.8




TiN coated contact points



#### Inspection Certificate Supplied as Standard

An Inspection Certificate is supplied with each instrument, which assures product quality and safety. On request, Mitutoyo can issue a Calibration Certificate, at a cost, from our accredited calibration laboratory.



#### **Digimatic Holtest**

- > Titanium-coated measuring pins provide excellent durability and impact resistance while allowing the instrument to measure close to the bottom of blind holes.
- > Large LCD readout.
- > Functions available: Presetting, Zero/ABS, Auto power On/Off, Data hold, Data output, Error alarm, Battery replacement alarm.
- > With ratchet stop for consistent force.

- > Measure deep holes by attaching an extension rod (optional).
- > Setting rings are included in sets, but optional for individual gages.
- > Supplied in fitted plastic case up to 4"/100mm. Over 4"/100mm supplied in wooden case.

> Resolution: .00005"/0.001mm (over 4" models: .0001"/0.001mm)



#### Digimatic Holtests - Individual Units

Order No.	Range	List	Promo
468-261	Digimatic Holtest, .27535"	\$1,564.00	\$1,251.20
468-262	Digimatic Holtest, .35"425" \$1,564.00		\$1,251.20
468-263	Digimatic Holtest, .4255"	\$1,578.00	\$1,262.40
468-264	Digimatic Holtest, 0.5" - 0.65"	\$1,718.00	\$1,374.40
468-265	Digimatic Holtest, 0.65" - 0.8"	\$1,718.00	\$1,374.40
468-266	Digimatic Holtest, 0.8" - 1"	\$1,761.00	\$1,408.80
468-267	Digimatic Holtest, 1.0 - 1.2"	\$1,761.00	\$1,408.80
468-268	Digimatic Holtest, 1.2" - 1.6"	\$1,803.00	\$1,442.40
468-269	Digimatic Holtest, 1.6" - 2.0"	\$1,817.00	\$1,453.60
468-270	Digimatic Holtest, 2" - 2.5"	\$1,972.00	\$1,577.60
468-271	Digimatic Holtest, 2.5" - 3"	\$1,972.00	\$1,577.60
468-272	Digimatic Holtest, 3" - 3.5"	\$2,000.00	\$1,600.00
468-273	Digimatic Holtest, 3.5" - 4"	\$2,028.00	\$1,622.40
468-274	Digimatic Holtest, 4" - 5"	\$2,649.00	\$2,119.20
468-275	Digimatic Holtest, 5" - 6"	\$2,719.00	\$2,175.20
468-276	Digimatic Holtest, 6" - 7"	\$2,888.00	\$2,310.40
468-277	Digimatic Holtest, 7" - 8"	\$3,014.00	\$2,411.20
468-278	Digimatic Holtest, 8" - 9"	\$3,212.00	\$2,569.60
468-279	Digimatic Holtest, 9" - 10"	\$3,282.00	\$2,625.60
468-280	Digimatic Holtest, 10" - 11"	\$3,395.00	\$2,716.00
468-281	Digimatic Holtest, 11" - 12"	\$3,550.00	\$2,840.00

#### Digimatic Holtests – Interchangeable Head Sets

	3		
Order No.	Range	List	Promo
468-976	Digimatic Holtest Head Set, 0.275" - 0.5"*	\$2,860.00	\$2,288.00
468-977	Digimatic Holtest, Head Set, 0.5" - 0.8"*	\$2,324.00	\$1,859.20
468-978	Digimatic Holtest, Head Set, 0.8" - 2"*	\$5,617.00	\$4,493.60
468-979	Digimatic Holtest, Head Set, 2" - 4"*	\$6,649.00	\$5,319.20
468-980	Digimatic Holtest, Head Set, 4" - 8"*	\$7,804.00	\$6,243.20

#### Digimatic Holtests - Complete Unit Sets

Order No.	Range	List	Promo
468-986	Digimatic Holtest, Unit-Set, 0.275" - 0.5"* \$5,579		\$4,463.20
468-987	7 Digimatic Holtest, Unit-Set, 0.5" - 1"* \$5,917.00		\$4,733.60
468-988	Digimatic Holtest, Unit-Set, 1" - 2"* \$6,7		\$5,364.80
468-989	Digimatic Holtest, Unit-Set, 2" - 3"*	\$7,352.00	\$5,881.60
468-990	Digimatic Holtest, Unit-Set, 3" - 4"*	\$7,606.00	\$6,084.80

#### **Measuring Deep Holes**

An extension rod (optional accessory) can be fitted to provide measurement of deep holes.







Complete-Unit Set



Interchangeable-Head Set

#### **Borematic**

Quick, spring-loaded lever action/movement

- > Titanium-coated measuring pins provide excellent durability and impact resistance while allowing the instrument to measure close to the bottom of blind holes.
- > Digital display with guick-action lever operation enables guick and easy measurement.
- > Built-in ABSOLUTE System eliminates the need to set the origin point every time the unit is turned on. The system is immune to over-speed errors, thus increasing the reliability of measurement.
- > The Digimatic Borematic is compatible with statistical process control systems and measurement support systems.
- > Built-in tolerance judgment function allows GO/NO-GO judgment based on user-defined upper and lower limit settings.

**MeasurLink**® ENABLED

ABSOLUTE<sup>®</sup>



Individual Gages: includes one digital display unit and one interchangeable measuring head (plus adapter if required)

Order No	Size Range	Accuracy	Extension Rod	List	Promo
568-461	0.275" - 0.350"	_		\$2,043.00	\$1,634.40
568-462	0.350" - 0.425"	±5µm ±0.00025 in	100mm ( <b>952322</b> )	\$2,043.00	\$1,634.40
568-463	0.425" - 0.500"	20.00025 111		\$2,043.00	\$1,634.40
568-464	0.50" - 0.65"	±5µm	1F0mm /0F3631\	\$2,085.00	\$1,668.00
568-465	0.65" - 0.80"	±0.00025 in	150mm ( <b>952621</b> )	\$2,039.00	\$1,631.20
568-466	0.8" - 1.0"			\$2,085.00	\$1,668.00
568-467	1.0" - 1.2"		1E0mm /0E2622\	\$2,156.00	\$1,724.80
568-468	1.2" - 1.6"		150mm ( <b>952622</b> )	\$2,395.00	\$1,916.00
568-469	1.6" - 2.0"			\$2,395.00	\$1,916.00
568-470	2.0" - 2.5"	±6µm		\$2,339.00	\$1,871.20
568-471	2.5" - 3.0"	±0.0003 in		\$2,423.00	\$1,938.40
568-472	3.0" - 3.5"		1F0mm (0F3633)	\$2,465.00	\$1,972.00
568-473	3.5" - 4.0"		150mm ( <b>952623</b> )	\$2,465.00	\$1,972.00
568-474	4.0" - 4.5"			\$2,578.00	\$2,062.40
568-475	4.5" - 5.0"			\$2,719.00	\$2,175.20

Complete Unit Gage Sets: includes several individual gages to cover the overall size range of the set

Order No	Overall Range	Range of Individual Gages	Setting Rings	List	Promo
568-965	0.275" - 0.5"	0.275-0.35", 0.35-0.425", 0.425-0.5"	0.35" DIA., 0.425" DIA.	\$7,058.00	\$5,646.40
568-966	0.5" - 1"	0.5-0.65", 0.65-0.8", 0.8-1"	0.65" DIA., 0.8" DIA.	\$7,368.00	\$5,894.40
568-967	1" - 2"	1-1.2", 1.2-1.6", 1.6-2"	1.2" DIA., 1.6" DIA.	\$7,692.00	\$6,153.60
568-968	2" - 3"	2-2.5", 2.5-3"	2.5" DIA.	\$5,508.00	\$4,406.40
568-969	3" - 4"	3-3.5", 3.5-4"	3.5" DIA.	\$6,113.00	\$4,890.40

#### Interchangeable-Head Sets

Order No	Overall Range	Range of Individual Gages	Setting Rings	List	Promo
568-928	0.275" - 0.5"	0.275-0.35", 0.35-0.425", 0.425-0.5"	0.35" DIA., 0.425" DIA.	\$3,142.00	\$2,513.60
568-929	0.5" - 1"	0.5-0.65", 0.65-0.8", 0.8-1"	0.65" DIA., 0.8" DIA.	\$3,564.00	\$2,851.20
568-930	1" - 2"	1-1.2", 1.2-1.6", 1.6-2"	1.2" DIA., 1.6" DIA.	\$4,339.00	\$3,471.20
568-936	2" - 4"	2-2.5", 2.5-3", 3-3.5", 3.5-4"	2.5" DIA., 3.5" DIA.	\$6,254.00	\$5,003.20

Includes one digital display unit with several interchangeable measuring heads (and adapters as required) to cover the total size range plus one extension rod



Technical Data

**Resolution:** 0.001mm or 0.00005

in/0.001mm Display: LCD Response speed:

Infinite

SR44 (1 pc), 938882, Battery:

for initial operational checks (standard accessory) Battery life: Approx. 5,000 hours in

continuous use **Scale type:** Electrostatic capacitance

ABSOLUTE encoder

#### **Functions**

GO/NO-GO judgment, GO/NO-GO judgment zoom, 2-Point preset, Zero-setting, Data hold, Error alarm, Low battery voltage alert, Data output, Function lock, 330° Rotary display, inch/mm conversion (inch/mm models)



Complete-Unit Set



Interchangeable-Head Set

# **Profile Projectors**

All prices are Canadian Dollar

#### **PH-3515F Profile Projector and 2D Processor Packages**

Heavy-Duty, Bench-Top Model with Horizontal Optical System featuring display w/ M2 geometric measuring software

- >ø14" screen, Horizontal Projector
- > 10" x 6" Travel T Slot table for accessories
- > Linear Glass Scales for accurate measurement
- > Profile and Fiber Optic Surface Illumination
- > Digital built-in angle counter
- > Maximum Load 45kg / 100lb
- > Available with M2 or QM Data 2D Processors

Order No.	Description	List	Promo		
PH-3515 Main Unit & Digital Readout Packages 5% Off					
M172868-1	PH-3515F KA Counter PKG # 1	\$16,211.00	\$15,400.00		
M172868-2	PH-3515F QM-DATA PKG # 2	\$18,866.00	\$17,922.00		
M172868-3	PH-3515F QM-DATA/OPT200 PKG # 3	\$21,801.00	\$20,711.00		
M172868-4	PH-3515F - M2 ADD-ON & Touch Screen PC	\$21,510.00	\$20,435.00		
M172868-5	PH-3515F - M2 ADD-ON, Touch Screen PC & Automatic Edge Detection	\$23,000.00	\$21,850.00		
Machine Stand (O	Machine Stand (Optional)				
64PMI308	Machine Stand for PH Series	\$1,830.00	\$1,350.00		
64AAB149	Tray, Counter, PH-A14/PH-3515	\$206.00	-		

(Includes installation and A2LA accredited calibration)

## Compatible Digital-Read-Out (DRO) Devices

#### M2 Software & Hardware: PH-3515 & PJ-PLUS





M2 is a universal 2D coordinate measurement software which has become the preferred software for many optical comparator users due to its intuitive user interface and data collection procedures.

- $\gt$  Software & All-In-One Touch Screen PC Included
- >Full Integration and A2LA Calibration conducted



KA-200 Counter: PH-3515 & PV-5110






Display unit for X & Y Linear Scales

- > ABSOLUTE and incremental modes (10 presets each)
- > 0.05-.0001mm / .02" .000005" in resolution
- > Calculator functionality

#### **Automatic Edge Detection**

MeasurLink® ENABLED
Data Management Software by Mitutoyo
An XY axis digital counter
is built into the PJ-Plus



Fiber Optic Edge Detection system integrated into M2 software via M2 Communication Unit.

Intuitive Edge Teach Functionality built into software.

Allows for continuous measurement of features, while storing data for post process analysis.

#### **PJ-Plus with M2 2D Processor Packages**

The PJ-Plus is a new series of profile projectors offered by Mitutoyo. This system utilizes LED lighting and a fanless design making it ideal for harsh manufacturing facilities or job shops.

additional of job shops.					
Order No	Description	XY Stage	List	Promo	
PJ-PLUS Main Units	- 5% Off				
302-801-10A	PJ-P1010A 4x4"/100x100m	4x4"/100x100m	Poguest	a Oueta	
302-802-10A	PJ-P2010A 8X4"/200x200mm	8X4"/200x200mm	Request	a Quote	
PJ-PLUS & M2 Packa	ges - 5% Off				
302-801-10-M2	PJ-PLUS 4x4 - M2 and Touchscreen PC Package	4x4"/100x100mm	- Request a Quote		
302-801-10-M2- EDGE	PJ-PLUS 4X4 - M2, Optical Edge Detection and Touchscreen	4x4"/100x100mm			
302-802-10-M2	PJ-PLUS 8x4 - M2 and Touchscreen PC Package	8x4"/200x100mm			
302-802-10-M2- EDGE	PJ-PLUS 8x4 - M2, Optical Edge Detection and Touchscreen	8x4"/200x100mm			
Machine Stand (Opt	ional)				
64PMI167	Machine Stand for PJ Series		Request	a Quote	

Prices effective October 1 through December 23, 2025



#### **PV-5110 Vertical (Downward) Profile Projector** (5% OFF Main Unit & 5% OFF DRO)

The PV-5110 Profile Projector is a downward optical axis projector fitted with a stable glass stage for delicate item inspection, ensuring accuracy and preventing damage. Its advanced optics and secure platform make it an optimal choice for precise applications, particularly with thin or delicate workpieces.

- >ø19.4" Screen, Vertical Projector.
- > Downward Optical Axis Provides improved oblique surface illumination.
- > LFD illumination.
- > Built-In Dual Oblique Surface Illumination for improved contrast.

Order No.	Description	List	Promo	
PV-5110 Main Unit & Digital Readout Interface Packages - 5% Off				
304-919-11A-KA	PV-5110 with KA Counter			
304-919-11A-QM	PV-5110 with QM Data	Request a Quote		
304-919-11A-QM-OPT	PV-5110 with QM Data and Optoeye			

PLEASE NOTE: No stand or elevated surface is required.



#### Additional DRO

QM Data: PH-3515, PJ-PLUS, PV-5110 & PJ-H30

QM-Data200 interface features easy-to-use key operations and allows for measurement results to be visualized on its LCD Display.



Plot Single Data Points



Return 2-Dimensional Graphic and Calculated Values

- > Built-In Guided Measurement Tutorials.
- > Programmable Measurement Procedures & Calculations.
- > Data Collection and USB Output.
- > Full Integration and A2LA Calibration conducted by Mitutoyo Field Service team.

MeasurLink ENABLED The QM-Data200 unit features the powerful QM 2D coordinate measurement software pre-loaded onto our rugged user interface. The



#### **PJ-H30 Vertical Profile Projector**

The Mitutoyo PJ-H30 is unique given its ability to produce an uninverted image, improving intuitive operation as the projected image appears in the same orientation as the workpiece.

- > Optical system with high NA lenses provides bright and high contrast images
- > The three-lens mounting turret includes a 10X lens as standard

> Built-in digital XY Counter

303-716-13A & 264-131-13A-PJH-OP



			100		
Order No.	Description	XY Travel	List	Promo	
PJ-H30 Main Units - 25%	OFF				
303-716-13A	PJ-H30A1010B	4x4"/100x100mm			
303-717-13A	PJ-H30A2010B	8x4"/200x100mm	Request a Quote		
303-718-13A	PJ-H30A2017B	8x6.7"/200x170mm			
303-719-13A	PJ-H310A3017B	12x6.7"/300x170mm			
Digital Readout Interface	e (Add-On Packages - Optio	onal) - 5% Off			
264-161-13A-PJH	QM-DATA200 Arm Typ	oe (PJ-H Series Package)	Reguest	a Ouete	
264-161-13A-PJH-OPT	QM-DATA200 Arm Type & Optoeye (PJ-H)		Request	a Quote	
Machine Stand (Optional	Machine Stand (Optional)				
64PMI167	Machine Stan	d for PJ Series	Request	a Quote	



303-717-13A PJ-H30A2010B





# Digital Profile Projectors

All prices are in Canadian Dollars

#### **Quick Image**

A double telecentric optical system with a large depth of focus, quick release stage, and a large selection of stage sizes make the Quick Image a high-efficiency VMM.

- > Manual or motorized stages available.
- > High pixel count color camera.
- > Automatic part location with pattern search tool.
- > CAD file overlay.
- > Profile of a line built in.
- > Stitching function allows for measurements of parts larger than the field of view.

Model No.	Package	Stage Size	List
QI-A1010D	361-850M3PK	4" x 4"	
QI-A2010D	361-851M3PK	8" x 4"	
QI-A2017D	361-852M3PK	8" x 7"	Request a Quote
QI-A3017D	361-853M3PK	12" x 7"	
QI-A4020D	361-854M3PK	16" x 8"	

Packages include machine, PC, software, installation, ISO 17025 accredited calibration, and online training

\* Manual Stage





#### **M3 Software**

An intuitive and thoughtful icon-driven user interface, a flexible probe library, and powerful tolerancing and programming make M3 the perfect solution for the Quick Image system.

- > Includes profile
- Allows profile of a line comparing measured points to a nominal CAD file
- >Includes DXF overlay
- Overlay a CAD file, similar to a profile projector overlay
- > Includes image stitching
- Measure large parts by combining multiple fields of view into a single image
- > Includes pattern search
- Automatically locate and measure a part regardless of size or orientation
- > Includes program finder
- Automatically identify a part and load the corresponding part program
- >Includes multi-measure
- Measure multiple features by drawing a box around them


# Digital Profile Projectors





All prices are in Canadian Dollars

Errors due to height are greatly minimized with a depth of focus up to 22mm. Measurement errors due to human focusing are eliminated.

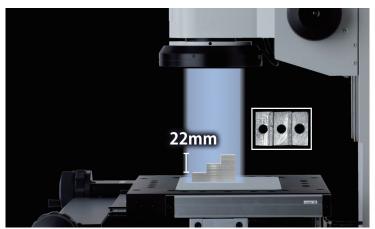


Measuring a stepped workpiece

Model No.	Package	Stage Size	List
QI-C2010D	361-860-11M3PK	8" x 4"	
QI-C2017D	361-861-11M3PK	8" x 7"	Request a Quote
QI-C3017D	361-862-11M3PK	12" x 7"	

Packages include machine, PC, software, installation, ISO 17025 accredited calibration, and online training \* Motorized Stage

#### **Auto-Recognition**

Use pattern search for multiple workpieces within the screen view, and measure them all in one operation with a single touch or mouse click. This eliminates the need for accurate positioning of workpieces and cumbersome setup of fixtures.

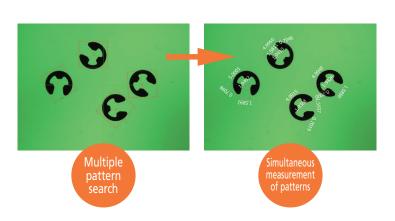




#### **Optional Thread Module**

Adds the ability to inspect external thread features and quickly calculate the Outside and Root Thread Diameters, the Pitch Diameter, the Lead, and the Root and Crest Truncation values.

Model No.	Package	List
64VIS002	LF-TM	Request a Quote

\* For M3 software

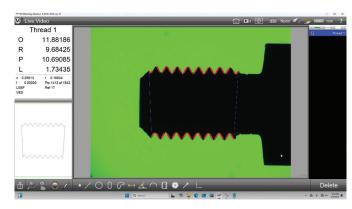



### **High-Accuracy Height Gage Linear Height LH-600F/FG**

The highest accuracy height gage on the market is now even easier to use.

The Mitutoyo LH-600F Linear Height Measurement System is the latest model in the Mitutoyo Linear Height Gage line, designed to be more user-friendly while maintaining the best-in-class reliability and accuracy of previous models.

#### **New Features:**

- > Rotatable, adjustable touch screen interface.
- > New self-check feature.
- > High-accuracy encoder more resistant to contaminants.
- > Improved 2D mode.
- > Calibration date warning.
- > S1 Digimatic output capable of sending data directly to Excel®, wired or wirelessly.
- > Additional probe and extension options.

#### Still Featuring:

- > Resolution down to 0.1µinch (selectable).
- > Highest accuracy in its class  $\pm$  (1.1+0.6L/600)  $\mu$ m.
- > Pneumatic full/semi-float system with built-in compressor.
- > Capable of standard measurements such as heights and diameters or advanced measurements like angles, diagonal distances and perpendicularity (optional probes may be required).
- > The Origin can be set at centerline positions, peaks of radii or simply on the surface plate or gage blocks.

#### Perpendicular/straightness measurement - Graph creation




Show results in real time during measurement.



You can monitor the graphs of past measurement results.



Show results after measurement.



Show measurement results in graph form.

Order No	Description	Range (Stroke)	Resolution (selectable)	List	Promo
518-360-13	LH-600F Inch/mm	977mm (600mm) / 38" (24")	0.0001/0.001/0.01/0.1mm	\$12,994.00	\$11,694.60
518-361-13	LH-600FG Inch/mm, Power Grip Model	9//111111 (000111111) / 38 (24 )	.0000001/.000001/.00001/.0001"	\$13,593.00	\$12,233.70

#### Easy operation using keypad and touch screen navigation

Contextual guidance on the large-screen touch panel supports your measurements.





Simple, straightforward keys with icons

Icons allow the user to find the required operation at a glance.



Height (top) measurement

Shaft (top)

measurèment

Hole (bottom) measurement



Height (bottom) measurement

Shaft (bottom)

measurement

Hole (top)

measurement



Width (inside)



Width (outside) measurement



Circle (shaft) measurement



Max.-Min. (top) measurement



Circle (hole) measurement



(bottom) measurement

#### Touch panel with guidance

Measurement guidance is displayed on the large touch panel of the 8.4-inch color LCD, enabling intuitive operation.





Operable with gloves

#### Advanced measurement functions



Part program measurement



2D measurement



Power

#### Measurement settings



Measurement origin setting



Probe selection



Measurement origin switching



Home screen




System settings




Data output

#### Expanded measurement area

With the new optional probes, you can now measure areas that were beyond the capacity of conventional probes.

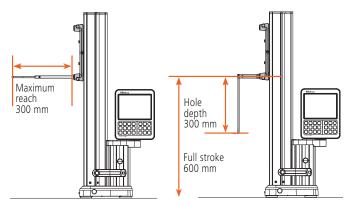



To see full brochure, use the QR code below.







# **ABSOLUTE 1D Height Gage**

- > High-resolution ABSOLUTE linear encoder for
- > Pneumatic flotation system / positioning grip allows for smooth movement along surface plate (select models).
- > Large, stationary display panel with user-friendly icon control
- > Digital and USB output: Supports Mitutoyo wireless
- > Fully compatible with existing Mitutoyo Digimatic peripherals (SPC cables, U-WAVE wireless transmitters, multiplexers, etc.).
- > Battery life of 1200 hours in continuous use with four AA batteries, an improvement from 300 hours.

# GO/±NG judgment by LED (red, orange, green) and measurement examples

> LEDs are activated at the time of tolerance judgment: green for GO, red for +NG, and orange for -NG. -NG,





### d2 Digimatic and USB outputs

• Digimatic and USB ports are provided as standard. Using the U-WAVE-T measurement data wireless communication system enables instant transmission of measurement data to a PC via wireless communication which reduces manual input errors and improves data reliability and operational efficiency.



To install U-WAVE-T, separately purchase the optional mounting plate (02AZE990).





- > Measure diameters, gap distances, center-to-center distances, and more.
- > Sub-display can show difference between current and previous measurement or distance from current measurement to origin.
- > The origin can be set at the top of a surface plate, centerline, or any top or bottom surface within its range.








#### **Measurement Examples**












Part No.	Range	Resolution	Remarks	List	Promo
64PKA094C	0 - 14"/ 0 - 350mm			\$5,501.00	\$5,225.95
64PKA095C	0 - 24"/ 0 - 600mm	0.001mm / 0.0005mm /.00005" / .0001" (selectable)		\$6,154.38	\$5,846.66
64PKA129C	0 - 14"/ 0 - 350mm	0.0011111117 0.0003111117.00003 7 .0001 (selectable)	Pneumatic Flotation	\$6,401.00	\$6,080.95
64PKA130C	0 - 24"/ 0 - 600mm		System	\$6,855.00	\$6,512.25

#### **Optional Accessories**

Order No.	Description	List	Promo
12AAC072	DEPTH PROBE	\$283.00	\$268.85
12AAA837	INDICATOR HOLDER (ACCEPTS 3/8" STEM)	\$206.00	\$195.70
12AAA793	PROBE EXTENSION HOLDER (3.3" / 85mm)	\$229.00	\$217.55
226118	SHANK WITH M3 THREAD SCREW	\$145.00	\$137.75
957265	20MM DIA. DISK STYLUS FOR LINEAR HEIGHT	\$543.00	\$515.85
957264	14MM DIA. DISK STYLUS FOR LINEAR HEIGHT	\$443.00	\$420.85
12AAF669	10PI BALL CONTACT POINT(COAXIAL)		\$318.25
957261	2MM DIA. BALL STYLUS FOR LINEAR HEIGHT	\$301.00	\$285.95
517-814-10	GRAPLATE 36X48" GRADE A	\$3,245.00	\$3,082.75
517-964-10	GRAPLATE STAND 36X48"	\$2,000.00	\$1,900.00
517-808-10	GRAPLATE 24X36" GRADE A	\$1,492.00	\$1,417.40
517-956-10	GRAPLATE STAND 24X36"	\$1,890.00	\$1,795.50
06AFM380D	USB-ITN-D INPUT TOOL DIRECT CABLE	\$278.00	\$264.10
02AZD730G-D	U-WAVE TRANSMITTER W/ CONNECTING CABLE (D)	\$464.00	\$440.80
02AZD810D	U-WAVE-RECEIVER	\$717.00	\$681.15

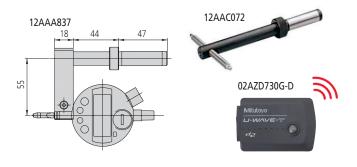





# Calipers / Caliper Checker

All prices are in Canadian Dollars

#### **Coolant-Proof Calipers**

- > Sealed housing is IP67 rated, meaning it's resistant to the coolants, dirt, grit and chips found in many manufacturing environments.
- > Easy to use no need to wipe or clean the scale.
- >.0005"/0.01mm resolution with ±.001" accuracy.
- > Automatic power-on/off.
- > Certificate of Inspection provided.



SPC cable - 1m: 05CZA624 2m: 05CZA625









#### COOLANT **PROOF**™ (P)67

COOLANTPROOF is the universal term of Mitutoyo Digimatic Small Tool Instruments that are free from measurement error and physical deterioration due to routine exposure to water, cutting oil or coolant. This high performance is achieved by using encoders that are inherently immune to contamination, where exposure is inevitable, combined with comprehensive sealing techniques and extremely oil-resistant materials to guarantee a long working life under normal operating conditions.

### **Digimatic Carbon Fiber Caliper**



Order No.	Range	Accuracy	Resolution	List	Promo
552-312-10	0(.5")-18"	+/002"	.0005"/0.01mm	\$1,341.00	\$1,206.90
552-313-10	0(.5")-24"	+/002"	.0005"/0.01mm	\$1,503.00	\$1,352.70
552-314-10	0(1")-40"	+/002"	.0005"/0.01mm	\$2,683.00	\$2,414.70
552-315-10	0(1")-60"	+/004"	.0005"/0.01mm	\$3,206.00	\$2,885.40
552-316-10	0(1")-80"	+/005"	.0005"/0.01mm	\$5,018.00	\$4,516.20

SPC cable – 1m: 05CZA624 2m: 05CZA625

- > Lightweight Digimatic Calipers that employ CFRP (Carbon Fiber Reinforced Plastics) in the beam and jaws.
- > Highly durable and easy to handle.
- > Direct readout of ID measurements from the LCD. (Offset value can be set easily by pressing the Offset key.)
- > Preset function for setting a desired starting point.
- > With SPC data output.
- > Special models available with ceramic jaws which are suitable for measuring abrasive and magnetic products.
- > Can be used in workshop conditions exposed to coolant, water, dust or oil.
- > Incorporates ABSOLUTE measurement system.
- > Automatic power-on/off.

<b>CERA Caliper Checker</b>		
20 50 100 150 0 50 250 200	200 250 150 100	300 OUTSIDE IRM 50 20 0
NISIDE 300	Mitutoyo	33%

Order No.	Range	Remarks (length to check)	List	Promo
515-565	0 - 12"	Outside measurement: 1", 2", 4", 6", 8", 10", 12" Inside measurement: 1", 2", 4", 6", 8", 10", 12"	\$6,443.00	\$4,316.81

Prices effective October 1 through December 23, 2025

#### **CERA Caliper Checker**

- > Permanently wrung, high grade CERA gage blocks in a protective metal casing.
- > Stands perpendicular for height gage inspection.
- \* Also includes same features as CERA Gage Blocks

#### CERA (Zirconia Ceramic) Gage Blocks\*

- > Extremely high wear resistance, 3x better than carbide.
- > Corrosion proof no oil needed.
- > Closest expansion coefficient to steel.
- > Anti-magnetic keeps away steel dust.
- > High wringing force due to high density.
- > Crack and burr resistant.
- > Low thermal conductivity excellent dimensional stability under brief temperature changes (from handling, etc.).

# Calipers / Caliper Checker

All prices are in Canadian Dollars

#### **Digimatic Calipers**

- > AOS Electromagnetic inductive sensor improves environmental resistance against dirt, water and oil.
- > A battery life of approximately 3.5 years has been achieved under normal use through the adoption of the Mitutoyo ABSOLUTE scale.
- > The slider configuration features an ergonomic, thumb-friendly shape.

- > Step-measurement capable.
- > The data output function allows integration into Statistical Process Control and measurement systems.
- > Display character height: 9mm.
- > AOS applies to 4", 6" and 8" models.
- > Resolution: .0005"/0.01mm.

**MeasurLink** ENABLED


		Data	Management Software by Mitutoyo
10 06285 in USOUT	90 100 110 120 130 1	ABSOLUTE EN	
	500-17	71-30	
	SPC	ABSOLUTE® Absolut System Powerled by MITUTOTO	ABSOLUTE AOS
	<b>7.</b>		AOS: Advanced Onsite Sensor

	Order No. Range		Remarks	List	Promo
	No SPC Outp				
	500-195-30	0-4"/0-100mm	.075" Round Depth Bar	\$205.00	\$199.00
	500-196-30	0-6"/0-150mm		\$221.00	\$210.00
	500-197-30	0-8"/0-200mm		\$319.00	\$303.00
	500-193-30	0-12"/0-300mm		\$636.00	\$541.00
	With SPC Out	tput Style			
fit	500-170-30	0-4"/0-100mm	.075" Round Depth Bar	\$243.00	\$236.00
fit	500-171-30	0-6"/0-150mm		\$259.00	\$246.00
	500-172-30	0-8"/0-200mm		\$342.00	\$332.00
	500-173-30	0-12"/0-300mm		\$700.00	\$595.00
	500-505-10	0-18"/0-450mm	Without Thumb Roller	\$1,161.00	\$1,103.00
	500-506-10	0-24"/0-600mm	Without Thumb Roller	\$1,276.00	\$1,212.00
	500-507-10	0-40"/0-1000mm	Without Thumb Roller	\$2,455.00	\$2,332.00

**fit** U-WAVE-Fit compatible

SPC cable with data switch - 1m: 959149 2m: 959150

### **Dial Caliper**



- > Smooth sliding with high shock protection.
- > Lock screw for dial bezel and for holding the sliding jaw position.
- > Can measure OD, ID, depth and steps.
- > Models available with carbide-tipped OD and ID jaws.

Order No.	Range	Remarks	List	Promo
505-742J	0 -6" .100"/rev		\$189.00	\$180.00
505-738	0 -6" .100"/rev	Carbide-tipped jaws	\$294.00	\$279.00
505-740J	0 -6" .200"/rev		\$171.00	\$162.00
505-743J	0 -8" .100"/rev		\$250.48	\$213.00
505-746	0 -12" .100/rev		\$390.23	\$371.00
505-749	0 -12" .200/rev		\$370.00	\$315.00
505-742-56J	0 -6" .100"/rev	Black Dial Face	\$189.00	\$180.00

#### **Offset Caliper**

> Main scale jaw can slide up and down to facilitate measurement of stepped sections. (Hard-to-reach dimensions such as A, B, C can be accurately measured).

> With depth bar.

> With SPC data output.



ABSOLUTE'

	Order No.	Range	Accuracy	Resolution	List	Promo
fit	573-701-20	0 - 6" / 0 - 150mm	±.001"	.0005" / 0.01mm	\$657.00	\$624.00
fit	573-702-20	0 - 8" / 0 - 200mm	±.001"	.0005" / 0.01mm	\$754.00	\$716.00
fit	573-704-20	0 - 12" / 0 - 300mm	±.0015"	.0005" / 0.01mm	\$1,012.00	\$961.00

573-701-20

fff U-WAVE-Fit compatible

SPC cable with data switch - 1m: 05CZA624 2m: 05CZA625

#### **Point Caliper**

> Narrow tip jaws fit into very small grooves and tracks, making many previously difficult outside measurements easier to achieve.

**MeasurLink®** ENABLED

> With depth bar.

> With SPC data output.







	Order No.	Range	Accuracy	Resolution	LIST	FIOIIIO
		0 - 6" / 0 - 150mm				
fit	573-725-20*	0 - 6" / 0 - 150mm	±.001"	.0005" / 0.01mm	\$716.00	\$680.00

**fit** U-WAVE-Fit compatible SPC cable with data switch - 1m: 05CZA624 2m: 05CZA625

#### **Low-force Caliper**

> Due to the low measuring force, these calipers are ideal for elastic or resilient workpieces such as plastic parts and rubber parts that standard calipers can't measure consistently.

> With SPC data output.



			57: -ink° ENABLED nt Software by Mitutoyo	3-291-30 SP	SOUTE DOB	
	Order No.	Range	Accuracy	Resolution	List	Promo
fit	573-291-30	0 - 7" / 0 - 180mm	±.002"	.0005" / 0.01mm	\$1,168.00	\$1,133.00
	<b>fit</b> U-WAVE-Fit o	ompatible				

#### **Quickmikes**

The new Quickmike series still boasts the super-fast spindle feed rate that's **20x faster** than standard micrometers.

- > IP65 protection can be used around cutting fluids.
- > MIN Hold the minimum measurement can be held on the display for more repeatable and accurate measurements.
- > Larger LCD 33% larger, 10mm character height.
- > Function lock prevents accidental changes.
- > 5 year battery life more operating time, less downtime looking for and replacing batteries.
- > Non-rotating spindle.




Spindle feed of

10 mm







#### **MDC-Lite Micrometer**

- > Provided only with zero set and in/mm (inch/metric models only) keys.
- > A ratchet stop or friction thimble for a constant measuring force.
- > Measurement readout with large characters on the LCD.
- > No spindle clamp. No data output.

Orde	er No.	Range	Resolution	Remarks	List	Promo
293-8	831-30	0 - 1" / 0 - 25.4mm	.00005" / 0.001mm	Ratchet Stop	\$198.00	-
293-8	832-30	0 - 1" / 0 - 25.4mm	.00005" / 0.001mm	Friction Thimble	\$209.00	-

# 0.18985 293-831-30

#### **Digimatic Micrometer**

- > New electromagnetic ABSOLUTE sensor Improved resistance to environmental conditions such as dirt, oil and water, which can cause false readings.
- > New ratchet thimble on select models improves one-hand operability.
- > New anti-slip finish for improved grip while taking measurements.
- ➤ Long battery life 2.4 years under normal operation.
- > Fully compatible with existing Mitutoyo Digimatic peripherals (SPC Cables, U-WAVE wireless transmitters, DP1-VA, etc.) – SPC output-enabled IP65 models.
- > Function-lock system prevents inadvertent setting changes.
- > Certificate of Inspection provided.





	Order No.	Range	Resolution	Remarks	List	Promo
fit	293-330-30*	0-1"/0-25.4mm	.00005"/0.001mm	Ratchet Stop	\$341.00	\$324.00
	293-340-30	0-1"/0-25.4mm	.00005"/0.001mm	Ratchet Stop	\$268.00	\$260.00
	293-344-30	0-1"/0-25.4mm	.00005"/0.001mm	00005"/0.001mm Ratchet Thimble		\$260.00
	293-348-30	0-1"/0-25.4mm	.00005"/0.001mm	Friction Thimble	\$270.00	\$261.90
	293-349-30	0-1"/0-25.4mm	.0001"/0.001mm	Ratchet Thimble, Tenths Reading	\$270.00	\$262.00
fit	293-331-30*	1-2"/25.4-50.8mm	.00005"/0.001mm	Ratchet Stop w/Standard	\$399.00	\$379.00
	293-341-30	1-2"/25.4-50.8mm	.00005"/0.001mm	Ratchet Stop w/Standard	\$343.00	\$326.00
	293-345-30	1-2"/25.4-50.8mm	.00005"/0.001mm	Ratchet Thimble w/Standard	\$343.00	\$326.00
<i>fit</i>	293-334-30*	0-1"/0-25.4mm	.00005"/ 0.001mm	Ratchet Thimble	\$365.00	\$347.00
fit	293-335-30*	0-1"/0-25.4mm	.00005"/0.001mm	Friction Thimble	\$340.00	\$330.00
	*with SPC Output	Output ## U-WAVE Fit compatible SPC cable with data switch – 1m: 05CZA662 2m.				



293-330-30

(IP)65



# Purchase the world's first 5µinch /0.1µm resolution micrometer and receive a USB input tool and cable (over \$394 in value)

Using precision digital measuring tools together with a USB input tool improves both measurement results and data reliability. The high-accuracy MDH with 5 millionths resolution can output in its entirety in both inch and metric. Resulting data can input directly to Excel®, MeasurLink® or other SPC programs.

> Range: 0-1", Resolution: .000005", Accuracy: +/- .000020

Part No.	Description	List
293-130-10	MDH Micrometer with high accuracy, high resolution output	\$2,308.00
05CZA662	SPC CONNECTING CABLE (1M)	Included
264-020	264-020 USB INPUT TOOL	



#### **ABSOLUTE Digimatic Height Gages**

Popular Mitutoyo single-beam height gages have been redesigned to be even easier to use with larger displays, various hardware accessories, and multiple data options such as wired and wireless output, data loggers and more.

#### Features:

- > Durable Build Iron detector and base, steel beam and holder.
- > Easy to use slider feed wheel.
- > Multiple data equipment options.
- > Other improvements: twist-off battery cap, 20% larger LCD, handy Data button.











Order No.	Range	Resolution	Functions	Drive Method	Data Output	Max. response speed	Battery Life	List	Promo
570-412	0"-12"/0mm-300mm		On/Off, Origin,				Approx. 5	\$1,033.00	\$1,002.00
570-413	0"-18"/0mm-450mm	0.0005" / 0/01mm	Zero/ABS, Hold/ Data. inch/mm	Slider-feed Wheel (manual)	Digimatic d1	Unlimited	Years Under	\$1,383.00	\$1,313.85
570-414	0"-24"/0mm-600mm		conversion"	(mandar)	u i		Normal Use	\$1,610.00	\$1,530.00

## Mitutoyo U-WAVE Bluetooth® Wireless Data Transmitters

#### All prices are in Canadian Dollars

U-WAVE is a wireless system that turns any Mitutoyo gage with Digimatic output into a wireless keyboard for fast, error-free data collection. U-WAVE transmitters now come in three models: Bluetooth®, Fit and Standard. Send data with a push of a button or request it from the PC or mobile device.




#### **U-WAVE Bluetooth®**

#### U-WAVE-TMB/TCB

The new U-WAVE Bluetooth® transmitter features:

- > Now utilizes the popular Bluetooth® 4.2 Low Energy Wireless Technology.
- > This new Bluetooth® version of U-WAVE allows a simple connection to smartphones, tablets and Bluetooth® enabled Laptops and PC's.
- > The same low-profile and ergonomic fit benefits of the U-WAVE-Fit.
- > A buzzer type and IP67 type with dustproof and waterproof specifications are available.
- > Up to 7 units can be connected to 1 Bluetooth® enabled PC without a receiver.
- > New U-WAVEPak for Android, iOS and Windows available at no cost.



































#### U-WAVE-TMB/TCB\*

O WATE THE PARTY					
Order No.	Model	el Measuring Instrument* Remarks		List	Promo
264-624-IP-S	U-WAVE-TCB	4", 6", 8", 12" standard caliper Transmitter and Connection Unit		\$409.00	\$368.10
264-624-IP	U-WAVE-TCB	4", 6", 8", 12" IP67 caliper	", 6", 8", 12" IP67 caliper Transmitter and Connection Unit		\$368.10
264-626-IP-M	U-WAVE-TMB	U-WAVE-TMB Coolant-proof (IP65) micrometer Micrometers (excl. S1, excl. QuickMike)  Transmitter and Connection Unit		\$409.00	\$368.10
02AZF700-TMB	U-WAVE-TMB	0.5" (12.5mm) Stroke for S1 Indicators	Transmitter and Connection Unit	\$434.00	\$390.60
02AZG011-TMB	U-WAVE-TMB	1" (25.4mm) Stroke or Larger for S1 Indicators	Transmitter, Bracket, and Connection Unit	\$509.00	\$458.10

<sup>\*</sup> No U-WAVE Receiver required

Prices effective October 1 through December 23, 2025

The new Mitutoyo U-WAVE-Fit wireless data transmitter fits to the back of popular Mitutoyo hand-held measuring instruments. This new design allows for a snug fit behind the display resulting in a more ergonomic feel. U-WAVE-Fit is the same technology as the U-WAVE-T, just a smaller version.









U-WAVE-TM for micrometers and U-WAVE-TC for calipers are available both as the buzzer and water/dust-proof IP67 types. The buzzer type notifies the normal reception of data by LED and buzzer sound. The water/dust-proof IP67 type is designed for harsh environments and therefore is only equipped with LED notification of data reception.

MeasurLink° ENABLED

Data Management Software by Mitutoyo

#### U-WAVE-Fit (Transmitter)

Order No.	Model	Model Measuring Instrument* Remarks		List	Promo
264-620-IP-S	D-IP-S U-WAVE-TC 4", 6", 8", 12" IP67 standard caliper Transmitter and Connection Unit			\$409.00	\$368.10
76/1-670-10   11-1/1/1/1-1/1   //" 6" X" 17" 126 / Calinor		Transmitter and Connection Unit	\$409.00	\$368.10	
264-622-IP-M	U-WAVE-TM	Coolant-proof (IP65) micrometer Micrometers (excl. S1, excl. QuickMike)	Transmitter and Connection Unit	\$409.00	\$368.10
02AZF700-TM	U-WAVE-TM	0.5" (12.5mm) Stroke for S1 Indicators	Transmitter and Connection Unit	\$434.00	\$390.60
02AZG011-TM	U-WAVE-TM	1" (25.4mm) Stroke or Larger for S1 Indicators	Transmitter, Bracket, and Connection Unit	\$509.00	\$458.10

<sup>\*</sup> Please contact Mitutoyo or distributor for further details

#### U-WAVE-R (Receiver)

Order No.	Remarks	Software	Number of U-WAVE-R units that can be connected to PC	Number of U-WAVE-T units that can be connected	List	Promo
02AZD810D	U-WAVE-R + Software	U-WAVE PAK	Up to 15	Up to 100	\$717.00	\$645.30

- The transmitter is designed to fit in the space behind the display, and the connecting cable has been replaced by a rigid connector.
- Approx. 20 m transmission range (within visible range).
- 2.4GHz wireless system for reliable and secure data transmission.
- Easy data export to Microsoft® Excel® or SPC software applications.
- Transmitter confirms data transfer by an LED signal and optional buzzer.
- An IP67 transmitter is available to ensure a coolant-proof gaging system.
- Low power consumption: 400,000 data transmissions with a single battery.

#### MeasurLink® Quality Data Management Software

Monitor, analyze, collect, calibrate, report and improve.





Achieve Total Quality Management with the Total Quality MeasurLink<sup>®</sup> license. This is a single floating license that can be accessed by anyone and anywhere on the network with every single module. For the engineer(s) who wants total freedom to continuously improve their quality department. **No annual fees**.

Order No.	Remarks	List	Promo
64AAB855F	MeasurLink® V10 Single Floating License	\$3,887.50	\$3,290.00

#### **TOM License Includes:**


- > Real-Time SPC
- > AQL Sampling
- > Advanced Data Analysis
- > Automated Reporting and Analysis
- > Data Collection Alerts
- > Gage Inventory Management
- > Gage Calibration
- > Gage R&R
- > Automated Ballooning
- > AS9102 First Article Reports
- > And more!

#### **Solution for Battery Foil Thickness Measurement**

The key to success:

High accuracy thickness measurement of thin foil and film samples

- > The combination of the Litematic and the vacuum plate system provides high accuracy measurement of easily deformed material.
- > Liternatics allow measurements at forces as low as 0.01N. The ceramic ball contact included with the Vacuum Packages will increase the force to 0.04N.
- > The vacuum plate absorbs the contact-sensitive specimen, such as battery film, onto the plate surface for more stable measurement.
- > Mitutoyo America provides vacuum plate packages as well as custom-made solutions.
- > Optional set 02AZE375 enables the application of up to 10 intermediate forces.
- > Data export to MeasurLink® and MS Excel®.







318-221A + 64PKA297







318-226A + 64PKA298 + 957460



#### Stand-alone Litematic Main Unit

Code	Model	Test Force*	List	Promo	
318-221A	VL-50-B	0.01N	\$12,088.00	\$11,484.00	


- > Measuring accuracy (20°C) up to (0.5+L/100) µm L=arbitrary measuring length (mm).
- > Repeatability up to 0.05 µm.
- \*The ceramic ball contact included with Vacuum Packages will add 0.03N.



#### Vacuum Package Add-ons

	Code	Model	List	Promo	
	64PKA297	50x50mm Vacuum Package	\$5,086.41	1	
,	K543722	Laser-activated Vacuum Package	\$17,620.97	\$14,978.00	

#### Separate Type Litematic Main Unit



- > Measuring accuracy (20°C) up to (0.5+L/100) µm L=arbitrary measuring length (mm).
- > Repeatability up to 0.05 µm.
- \*The ceramic ball contact included with Vacuum Packages will add 0.03N.



#### Vacuum Package Add-ons

Code	Model	List	Promo
64PKA298	100x100mm Vacuum Package	\$5,598.91	-

# EJ Series Industrial Interface-mounted Compact Counter

#### Compact size and easy to use

Up to 8 compact counters (EJ counters) can be linked providing the capacity to connect up to 16 gages. On a DIN rail, each unit can be connected directly without using cables, so it takes up minimal space. All linked units and gages can be driven by a single power source.

#### EtherNet/IP, CC-Link, PROFINET, EtherCAT or USB Connection

Data can be output through an industrial interface by linking a compact counter (EJ counter) with an interface unit. Constant data monitoring and positional management are performed. A USB interface is also provided for easy connection with a computer.

Note: The range of interfaces is set to be expanded in the near future.

#### Calculation function

Enables sum difference operations between 2 gages connected to the same counter. Functions such as tolerance judgment and peak hold are also included.



Order No	Description	List	Promo
542-190	LG100-110, Range: .4"/10mm, Res: .00005"/1µm	\$863.00	\$837.00
542-193	LG100-125, Range: 1"/25mm, Res: .00005"/1µm	\$1,070.00	\$1,038.00
542-196	LG100-150, Range: 2"/50mm, Res: .00005"/1µm	\$1,276.00	\$1,238.00
542-191	LG100-0510, Range: .4"/10mm, Res: .00002"/0.5μm	\$889.00	\$862.00
542-194	LG100-0525, Range: 1"/25mm, Res: .00002"/0.5µm	\$1,142.00	\$1,108.00
542-197	LG100-0550, Range: 2"/50mm, Res: .00002"/0.5μm	\$1,314.00	\$1,275.00
542-192	LG100-0110, Range: .4"/10mm, Res: 5µinch/0.1µm	\$1,329.00	\$1,130.00
542-195	LG100-0125, Range: 1"/25mm, Res: 5µinch/0.1µm	\$1,100.00	\$1,067.00

#### **Linear Gage LG200 Series**







Counter unit



Order No	Description	List	Promo
542-081	Main EJ Module Counter	\$755.00	\$732.00
542-081A	Main EJ Module w/AC Components	\$790.00	\$766.00
21HZA149	USB Only Interface	\$514.00	\$499.00
21HZA186	CC-Link Module (Mitsubishi), and USB	\$1,112.00	\$1,079.00
21HZA187	PROFITNET Module	\$1,280.00	\$1,242.00
21HZA188	EtherNet/IP Module	\$1,266.00	\$1,228.00
21HZA264	EtherCat Module	\$1,313.00	\$1,274.00

#### High accuracy

Precision and accuracy demanded by the automated assembly and inspection markets are guaranteed. Due to our expertise as a manufacturer of measuring instruments, repeatability in the full measurement range ( $2\sigma$ ) and narrow-range precision are also guaranteed.

#### **Environment resistance**

Sliding durability of more than 50 million cycles\*, with protection level of IP67G. A highly oil-resistant material is used in the rubber cap and cable sheath so it can be used in harsh environments.

\* 10 mm range models (Actual value from in-house tests)


#### Reference point detection (LG100 Series)

Reference point signal output functions are featured throughout this series. When incorporating into a device, the master setting value is easy to set and is retained after shutdown.

#### **LG QuickSetup Tool**

A configuration tool is FREE for use with the EJ counter when connected via the optional USB interface. Multiple settings normally carried out with counter operating keys can now be easily applied from a computer. Live displays allow for easily viewing gage positions or measurements at a glance.

Note: This software can be used free of charge and downloaded from the Mitutoyo website. https://www.mitutoyo.co.jp/eng/contact/products/lg/



# Digimatic Scales

All prices are in Canadian Dollars


#### **Digimatic Quill Kit**

Easy Installation, Fits Most Vertical Knee Mills

- > Easy-to-read LCD with resolution of .0005"/0.01mm. 0-6" travel.
- > Push-button controls for inch/mm, Zero-Set and On/Off.
- > Powered by a single SR-44 Battery which lasts about 1 year with normal use.
- > SPC Output for data transmission to data processors or a remote display.
- > ABS encoder.

Order No.	Description	List	Promo
053906B	Digimatic Quill Kit Complete with Brackets & Scale for Bridgeport Type Machines	\$434.00	\$421.00





#### **ABSOLUTE Digimatic Scale Units**

- > The Origin key allows setting of an ABSOLUTE zero point to be used as reference in subsequent measurements. Once set, the ABS Digimatic Scale Unit is ready to show its true position whenever turned on, rather than 0.00" as with standard models.
- > The Zero/ABS key allows the display to be zero-set at any slider position along the beam for incremental comparison measurements. This key will also allow return to the ABSOLUTE coordinate with a display of the true position from the origin point.
- > No rack, no pinion, no glass scale. Digimatic scale unit is safely embedded in the hardened stainless steel blade.
- > Horizontal or vertical face according to the scale mounting direction.
- > Multi-function types with diameter displaying function are also available for lathes. (Contact Mitutoyo.)
- > All units come with two mounting brackets, each located at either end of the scale.
- > With SPC data output.

376	
DC LUTE"	

**ABSOLUIE** 


Order No Model Range		Accuracy Resolution		Туре	List	Promo	
572-210-30	SD-4"DX	0-4" / 0-100mm	.001" / 0.03mm	.0005" / 0.01mm	Horizontal Single-function	\$331.00	\$321.00
572-211-30	SD-6"DX	0-6" / 0-150mm	.001" / 0.03mm	.0005" / 0.01mm	Horizontal Single-function	\$350.00	\$333.00
572-212-30	SD-8"DX	0-8" / 0-200mm	.001" / 0.03mm	.0005" / 0.01mm	Horizontal Single-function	\$398.00	\$386.00
572-213-10	SD-12"D	0-12" / 0-300mm	.002" / 0.04mm	.0005" / 0.01mm	Horizontal Single-function	\$769.00	\$654.00
572-310-10	SDV-6"D	0-4" / 0-100mm	.001" / 0.03mm	.0005" / 0.01mm	Vertical Single-function	\$367.00	\$349.00
572-311-10	SDV-6"D	0-6" / 0-150mm	.001" / 0.03mm	.0005" / 0.01mm	Vertical Single-function	\$389.00	\$370.00
572-312-10	SDV-8"D	0-8" / 0-200mm	.001" / 0.03mm	.0005" / 0.01mm	Vertical Single-function	\$451.00	\$383.00
572-313-10	SDV-12"D	0-12" / 0-300mm	.002" / 0.04mm	.0005" / 0.01mm	Vertical Single-function	\$868.00	\$738.00




Data Management Software by Mitutoy

**Applications** 


Machine table position



Drilling machine stroke position




Focus setting on optical instruments in




**Special Applications** 

As a measurement jig for outdoor use (SD-G)



Detector head mechanism



Prices effective October 1 through December 23, 2025

#### **Mitutoyo Digital Readout Packages**

Mounting hardware included on all machine retrofit packages

\$200 PER PACKAGE






#### All DRO Packages Include:


- >KA-200 Counter
- > KA-200 Counter tray/arm kit
- > High Resolution Linear Scales (down to .0001" or better!)
- > Bracket Kit(s)




Package Part No.	Description	X Travel	Y Travel	Z Travel	X Axis Type	Y Axis Type	Z Axis Type	List	Promo
64PKA058D	12" X 30" DRO Mill Package	30"	12"	-	AT715	AT715	-	\$2,303.00	\$2,103.00
64PKA059D	12" X 36" DRO Mill Package	36"	12"	-	AT715	AT715	-	\$2,341.50	\$2,141.50
64PKA060C	14" X 30" DRO Mill Package	30"	14"	-	AT715	AT715	-	\$2,201.00	\$2,001.00
64PKA175B	16" X 30" DRO Mill Package	30"	16"	-	AT715	AT715	-	\$2,314.00	\$2,114.00
64PKA062D	16" X 36" DRO Mill Package	36"	16"	-	AT715	AT715	-	\$2,353.00	\$2,153.00
64PKA063C	16" X 40" DRO Mill Package	40"	16"	-	AT715	AT715	-	\$2,380.00	\$2,180.00
64PKA039C	8" X 40" Lathe Package	8"	-	40"	AT113	-	AT715	\$2,508.00	\$2,308.00
64PKA194B	8" X 36" Lathe Package	8"	-	36"	AT113	-	AT715	\$2,482.00	\$2,282.00
64PKA054A	48" X 14" Lathe Package	14"	-	48"	AT116	-	AT715	\$2,075.00	\$1,875.00
64PKA052B	14" X 40" Lathe Package	14"	-	40"	AT116	-	AT715	\$2,310.00	\$2,110.00
64PKA057B	16" X 60" Lathe Package	16"	-	60"	AT116	-	AT715	\$2,875.00	\$2,675.00
64PKA026B	6" X 12" Grinder Package	6"	12"	-	AT113	AT113	-	\$3,301.00	\$3,101.00
64PKA028C	8" X 12" Grinder Package	8"	12"	-	AT113	AT113	-	\$3,362.00	\$3,162.00
64PKA029B	8" X 14" Grinder Package	12"	14"	-	AT113	AT113	-	\$3,406.00	\$3,206.00
Other nackages and kits:	are available for mills lathes grinders and	custom mac	hings and an	nlications Co	ntact vour local o	distributor for dat	ailc		

Other packages and kits are available for mills, lathes, grinders and custom machines and applications. Contact your local distributor for details.











## Hardness Testers

All prices are in Canadian Dollars

#### **Rockwell and Rockwell Superficial Hardness Tester**

With Real-Time Electronic Test Force Control

- > Closed-loop control of testing forces.
- > Initial and Total test forces (loads) are applied with unparalleled accuracy and repeatability.
- > Extended indenter arm reaches inside diameters and hard-to-reach surfaces at eye level, allowing the operator to easily see where the indenter accesses small or hard-to-reach parts.
- > Automatic cycle start after initial set point is reached.
- > Continuous test mode for automatic testing of all like-sized parts.
- > All hardness parameters set automatically via the touch screen.
- > Cylindrical and spherical surface corrections.
- > Auto conversion to most common hardness scales or tensil strength.



Model No.		HR-530	HR-530L		
Order No.		810-233-33	810-333-33		
Hardness testing	methods	Rockwell / Rockwell Superfic	cial / Brinell / Plastics Hardness		
Initial Test Force		29.42 N (3kgf),	98.07 N (10kgf)		
	Superficial	147.1 N (15kgf), 294.2 N	I (30kgf), 441.3 M (45kgf)		
	Rockwell	588.4 N (60kgf), 980.7 N	l (100kgf), 1471 N (150kgf)		
Test Force (N)	Light Force Brinell	61.29 N (6.25kgf), 98.07 N (10kgf), 153.2 N (15.625kgf), 245.2 N (25kgf), 294 (30kgf), 306.5 N (31.25kgf), 612.9 N (62.5kgf), 980.7 N (100kgf), 1226 N (125 1839 N (187.5kgf)			
Test Force Contro	ol .	Automatic (load / hold / unload)			
Maximum Specin	nent Size	Height: 9.8" (250mm) Depth: 5.9" (150mm)	Height: 15.5" (395mm) Depth: 5.9" (150mm)		
External Data Ou	tput	RS-232C, Digimatic, USB2.0			
External	Main Unit	9.84" x 26.38" x 23.82" (250 w x 667 d x 621 h mm)	11.6" x 26.2" x 30.1" (300 w x 667 d x 766 h mm)		
Dimensions	Touch-Panel Display	191 w x 147 d x 71 h mm (Color)			
Mass		Approx. 60 kg	Approx. 69 kg		
	List	\$20,901.00	\$28,788.48		
	Promo	\$19,000.00	\$26,198.00		
			* Must purchase Power Cord <b>02ZAA01</b>		







#### **ASTM Compliant HR Series Rockwell and Superficial Hardness Tester Packages Include:**

- > Certified Blocks and Indenters
- > C and N Scale Indenter
- > 1/16" Carbide Ball Indenter
- > HRC30 Rockwell Test Block
- > HRC63 Rockwell Test Block
- > HRBW95 Rockwell Test Block
- > HR30N60 Rockwell Test Block
- > HR30TW70 Rockwell Test Block
- > Certificate stating conformance to ASTM E 18
- > Mitutoyo Installation and A2LA Calibration



\*HR-430MR includes only diamond indenter, C-scale indenter, HRC and HRBW blocks listed above\*

#### Calibration Set

Order No.	Order No.	Order No.	Order No.					
64HAA462	64HAA463	64HAA464	64HAA465					
HRC Scale	HRBW Scale	HR30N Scale	HR30TW Scale					
Test Blocks Test Blocks		Test Blocks	Test Blocks					
64HAA181	64HAA181 64HAA172		64HAA303					
64HAA177	64HAA170	64HAA266	64HAA301					
64HAA173 64HAA168		64HAA262	64HAA299					
	Universal Style Indenter with Flat							
64HAA100	64HAA119	64HAA101	64HAA119					



For more information regarding compatible accessories such as fixtures, indenters, and calibration blocks use the QR Code!



### **A Complete Line of ASTM Compliant Rockwell Hardness Testing Machines**















Calibration included	HR-320MS	HR-430MR	HR-430MS	HR-530/HR-530L	HR-610A/HR-620A	HR-620B
Rockwell Scales		Х				
Rockwell and Superficial	Х		Х	Х	Х	Х
Dead Weight	Х	Х	Х			
Individual Hanging Weights	Х					
Dial Weight		Х	Х			
Automatic break		Х	Х			
Closed Loop				X	Х	Χ
Digital Display	Х	Х	Х	Х	Х	Х
7.1" Max Sample Height	Χ	Х	Х			
9.8" Max Sample Height				HR-530	Х	Х
15.5" Max Sample Height				HR-530L		
6.5" Max Depth	Х	Х	Х			
5.9" Max Depth						
8.6" Max Depth				X	Х	Χ
CNC						Χ
Motorized X Stage (Optional)					Х	Χ
Motorized Y Stage						Χ
Software Control and Analysis						Χ
ASTM Compliant HR Series Rockwell & Rockwell Superficial Packages - All 10% Off	810-192-21	810-193-21	810-194-31	810-233-33 (HR530) or 810-333-33 (HR530L)	810-512-23 (HR610A) or 810-522-23 (HR620A)	810-527-21
List	\$12,622.00	\$14,126.00	\$18,580.32	\$20,901.00 / \$28,788.48	\$39,196.00 / \$42,453.00	\$70,791.00
Promo	\$11,359.80	\$12,713.40	\$16,722.29	\$19,000.00 / \$26,198.00	\$35,276.40 / \$38,207.70	\$63,711.90

#### \* Must purchase Power Cord 02ZAA010

### **Scalable Interfacing Options**



HR-320MS, HR-430MR, HR-430MS Interface



HR-530, HR-530L, HR-610A & HR-620A Touchscreen Controller



HR-620B PC Interface, Utilizing AVPAK Software



#### **Heavy Load Hardness Testers - HV Series**

#### Highly Versatile Basic Model

#### HV-110/120 System A

- > Equipped with a high performance motorized test force selection function and motorized turret mounts.
- > Operates as smoothly as electric models but with the certainty of traditional test forces.
- > A list function makes it easy to perform multi-point and average hardness evaluations which required extra effort or external data processors with conventional manual models. This convenient screen enables consistency of test results.
- > Motorized test force selection and motorized turret positions can be easily controlled via a touch screen control panel. Adjustable X-Y stage with built-in digital micrometers for detailed measurement analysis.








Model	Test Force								Order No.	Body	List	Promo	
	V.S*	HV1	HV2	HV3	HV4	HV5	HV10	HV20	HV50				
HV-110	N	9.807	19.61	29.52	49.03	98.07	196.10	294.2	490.3	810-440-13	A TYPE		
	kgf	1	2	3	5	10	20	30	50			Paguast a Quata	
	V.S*	HV 0.3	HV 0.5	HV1	HV2.5	HV5	HV10	HV20	HV30		Request a Quot		. a Quote
HV-120	N	2.942	4.903	9.807	24.51	49.03	98.07	196.1	294.2	810-445-13	A TYPE		
	kgf	0.3	0.5	1	2.5	5	10	20	30				

<sup>\*</sup>V.S - Vickers Scale

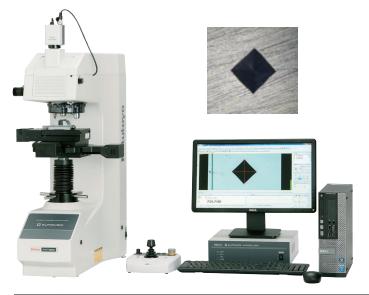

# Advanced models promise additional productivity improvements

#### HV-110/120 System B,D



- > D series testers add powered X-Y stages which enable automatic continuous testing. This allows extended multi-point testing, complex pattern creation and multiple workpiece analysis to be carried out automatically.
- > D series testers add Auto Focus and create a fully automatic system that dramatically shortens the cycle time of your test and indentation analysis!

Model	Test Force									Order No.	Body	List	Promo	
	V.S*	HV1	HV2	HV3	HV4	HV5	HV10	HV20	HV50			B / D TYPE		
HV-110	N	9.807	19.61	29.52	49.03	98.07	196.10	294.2	490.3	810-443A	B / D TYPE			
	kgf	1	2	3	5	10	20	30	50					
	V.S*	HV 0.3	HV 0.5	HV1	HV2.5	HV5	HV10	HV20	HV30			Request a Quote		
HV-120	N	2.942	4.903	9.807	24.51	49.03	98.07	196.1	294.2	810-448A	A B/D TYPE	B / D TYPE		
	kgf	0.3	0.5	1	2.5	5	10	20	30					

<sup>\*</sup>V.S - Vickers Scale

<sup>\*</sup>Additional Components Required for a Complete System

<sup>\*</sup>Additional Components Required for a Complete System

#### Micro Vickers Hardness Testers - HM Series

- > HM Type A systems include a built-in measuring eyepiece for indentation analysis and accurate workpiece positioning.
- > Automatic Turret (Touch-screen controlled in Type A systems and software controlled via AVPAK in Type B and D systems).
- > Test force range 10g-1000g (HM-210) and .05-2000g (HM-220).
- > LFD illumination
- > Type B and D systems include a camera for software analysis (Type A systems can use optional camera for digital imagery).
- > Type A and B systems use micrometer-controlled adjustable stages and Type D systems utilize a motorized XY Stage.



SCAN ME

MeasurLink® ENABLED Data Management Software by Mitutov

Compact Dial

811-335-10

Seamless assistance is a scan away -Connect with your local representative by making an inquiry today!



### 20% OFF MICRO VICKERS TESTERS!

Functions	System A	System B	System D
Focusing	Manual	Manual	Automatic
Testing Action	Single Point	Single Point	Pattern Specific
Test-point Positioning	Manual X-Y Stage	Manual X-Y Stage	Automatic X-Y Stage
Measuring Indentations	Manual Monoscope	Automatic by AVPAK	Automatic by AVPAK
Camera (for observing and measuring indentations)	600,000 Pixels B&W*	Color, 3 Million Pixels	Color, 3 Million Pixels
Operating the Main Unit	Touch Panel	PC**	PC**
Order No	64AAB305PA	64AAB323PA	64AAB380PA
Main Unit	HM-210A	HM-210B	HM210D
List Promo Request a Quote			

<sup>\*\*</sup> PC sold separately

## Portable Hardness Testers

#### **Durometers (Digital and Analog)**

For Rubber and Plastic Hardness Testing

Order No	Model	Scale	Display	Graduation	Range	Indenter	List	Promo
811-335-10	HH-335	Shore A	Analog	1.0	10~90	Blunt Taper	\$854.00	\$768.60
811-336-10	HH-336	Shore A	Digital	0.5	10~90	Blunt Taper	\$1,825.00	\$1,642.50
811-337-10	HH-337	Shore D	Analog	1.0	20~90	Sharp Point	\$854.00	\$768.60
811-338-10	HH-338	Shore D	Digital	0.5	20~90	Sharp Point	\$1.825.00	\$1.642.50





**MeasurLink**® ENABLED Data Management Software by Mituto

Compact

Digital 811-336-10

#### **HH-411 Hardmatic**

Rebound Leeb portable hardness tester featuring reproducibility and ease of operation on large parts. It is lightweight and can be carried into the shop or out in the field.

Order No.	Туре	List	Promo
810-298-10	HH-411 Hardmatic	\$5,695.00	\$5,410.00

<sup>\*</sup>Additional packages available. Please contact your local Mitutoyo distributor or Mitutoyo sales representative.

# MF Measuring Microscopes with Metlogix M2 Software and Touch-Screen Tablet

Featuring M2 geometric measuring display

- > Highest measuring accuracy in its class.
- > Stage travel range up to 400mm x 200mm / 16in x 8in.
- > Quick release mechanism and zero-set buttons on stage controls increase operability when working on larger workpieces.
- > Easy-to-use all-in-one PC Touch Screen Display.
- >M2 Geometric 2D Measurement Software.
- > Camera port is standard on all models.
- > Wide range of objectives available from 1x to 100x.
- > M2 Retrofit package available for D generation MF and MF-U microscopes.
- > Microscope packages with M2 software and tablet are listed below.

#### Main Units on Promotion

Order No	Description	List	Promo
176-961-13	MF-A1010D 100x100mm (mm/inch) Manual Microscope		
176-962-13	MF-A2010D 200x100mm (mm/inch) Manual Microscope		
176-963-13	MF-A2017D 200x170mm (mm/inch) Manual Microscope	Poguest	t a Ouata
176-864-10	MF-A3017D 300x170mm (mm/inch) Manual Microscope	Request	t a Quote
176-965-13	MF-A4017D 400x200mm (mm/inch) Manual Microscope		
64PKA234A	M2 Retrofit Kit for MF/MF-U Microscopes		
		•	

<sup>\*</sup>Additional stage configurations and sizes available

#### **MF-U Measuring Microscopes**

- > Measuring accuracy that is highest in its class (and conforms to JIS B 7153).
- > Compatible with both brightfield and darkfield objective lenses.
- > Manual or motorized turrets available dependent on model.
- > Compatible with M2 retrofit Kit.

Model No. (XY stage size)	MF-UA2010D		
Order No.	176-872-10		
XY stage travel range	8 x 4" / 200 x 100mm		
Z-axis travel range	6" / 150mm		
Focusing method	Manual focusing (Coarse focusing: 30mm/rev., Fine focusing: 0.2mm/rev.)		
Measurement method	Linear encoder (2-axis model: X / Y-axis)		
Resolution (switchable)	.0001" / .00005" / .00001" (0.001mm / 0.0005mm / 0.0001mm)		
Measuring accuracy (at 20°C)	XY-axis: (2.2+0.02L)μm, L = Measuring length (mm) when not loaded, JIS B 7153		
Floating function	X and Y axes with Quick-release mechanism		
XY stage top size	13.78 x 11.02" / 350 x 280 mm		
Effective glass size	9.84 x 5.09" / 250 x 150 mm		
Max. stage loading	22lbs / 10kg		
Max. workpiece height	6" / 150mm		
List	Paguart a Quata		
Promo	Request a Quote		

<sup>\*</sup>Additional components required for a complete system







MeasurLink® ENABLED

Data Management Software by Mitutoyo

Want to take a closer look? Scan the QR code to make your product inquiry today!



( SCAN ME



Data Management Software by Mi

To learn more about our MF and MF-U Microscopes please visit our webpage.







#### **TM Toolmakers' Microscopes**

- > Adjustable illumination intensity.
- > Angle measurement is performed easily by turning the angle scale disc to align the cross-hair reticle with the workpiece image.
- > Includes standard accessories which create an overall magnification of 30X. Magnifications can be changed from 20X 200X by using optional objectives and/or eyepieces.
- ➤ .000050" Resolution Digimatic micrometer heads included.





Newly designed LED illumination

TM-A505B	TM-A1005B			
176-820-11A	176-821-11A			
Standard accessory: 15X (field number: 13), Options: 10X, 20X				
Standard accessory: 2	2X, Options: 5X, 10X			
4.53" / 115mm	4.21" / 107mm			
Stepless brightness adjustment, White LED light source, with green filter				
Oblique single-source type, Stepless brightness adjustment, White LED light source				
2" x 2" / 50×50mm	4" x 2" / 100×50mm (An optional 2"/50mm gage block is required to cover full range. A CERA block is recommended.)			
3.8" x 3.8" / 96×96mm	6" x 3.8" / 154×96mm			
11 lbs. / 5kg				
Micrometer heads included				
\$7,969.00	\$10,392.00			
\$7,172.10	\$9,352.80			
	176-820-11A  Standard accessory: 15X (field r Standard accessory: 1 4.53" / 115mm  Stepless brightness adjustment, V fil Oblique single-source type, Stepl LED ligh  2" x 2" / 50x50mm  3.8" x 3.8" / 96x96mm  11 lbs Micrometer h \$7,969.00			





Order No.	Description
64PMI247	MOTICAM S1, 1.2 MEGAPIXEL-1/3" CMOS, USB
64PMI249	MOTICAM S3, 3.0 MEGAPIXEL-1/2" CMOS, USB
64PMI248	MOTICAM S6, 6.0 MEGAPIXEL-1/1.8" CMOS, USB
64PMI252	MOTI-CAM 4000, 8 MEGAPIXEL, 1/1.8" CMOS , USB/HDMI
63AAA060	.37x C-Mount Eyetube Adapter

#### **Trinocular Stereo Microscope SMZ143-N2LED**

- > Continuous 1X 4X magnification.
- > Image always in focus throughout zoom range.
- > Crisp, erect images with high resolution and excellent stereoscopic effect.
- > Stereo-tube can be rotated a full 360° for viewing at any angle.
- > Bilateral zoom control knob adds convenience and increases operator efficiency.
- > Diopter adjustment for both eyepieces.

Model	MSM-414TL
Order No.	377-993A
Optical tube	Trinocular head
Total magnification	10X - 40X
Eyepiece	Widefield WF10X/20mm
Objective	1X - 4X
Working distance	80mm
Field of view	20mm - 5mm
Dimensions	237x170x335mm
Mass	6.2kg

Order No.	Description	List	Promo			
Stereo Microscope Unit						
377-993A	MSM-414TL TRINOCULAR MICROSCOPE	Request a Quote				
Observation	Observational Camera Accessories					
377-481	C-mount Video Adapter for SMZ143-N2LED	\$76.00	\$68.40			
64PMI309	MOTICAM 4000X, 1.45 x 1.45µm PIXEL, HDMI / USB MULTIPOINT	\$3,100.00	\$2,790.00			

<sup>\*377-481</sup> and 64PMI252 purchased separately



Camera with software for digital viewing



www.mitutoyo.ca

## **ALWAYS THERE. ALWAYS READY.**

## YOUR DEDICATED SUCCESS TEAM





Scan the QR Code to learn more about the training we have to offer Mississauga ON 2121 Meadowvale Blvd., Mississauga, ON L5N 5N1 Tel. (905) 821-1261

Montréal QC #129-7075 place Robert-Joncas, Montréal, QC H4M 2Z2 Tel. (514) 337-5994 Ext. 251

Total Number of Employees: Approximately 100

Mitutoyo products are sold through authorized distributors which can be found at www.mitutoyo.ca/find-a-distributor/

We reserve the right to change prices and specifications without notice. Visit mitutoyo.ca/promotions to ensure pricing is up to date. Not valid with any other offer or promotion. This promotion is for Canadian market only. Request formal quotation for complete details.

Note: All information regarding our products, and in particular the illustrations, drawings, dimensional and performance data contained in this printed matter as well as other technical data are to be regarded as approximate average values. We reserve the right to make changes to the corresponding designs. The stated standards, technical regulations, descriptions and illustrations of the products were valid at the time of printing. In addition, the products are subject to Canadian Export Administration Regulations. Re-export or relocation of Mitutoyo products may require prior approval by an appropriate governing authority. We try to be as accurate as possible, however, there may be some errors in text, specifications or price. Please confirm with your customer service rep. Some items may not be exactly as shown. Prices are in Canadian dollars, unless otherwise specified. Applicable taxes and shipping charges are extra.

# **Mitutoyo**

Mitutoyo Canada | Precision is our Profession

EXPERIENCE MITUTOYOMS SOLUTION CENTERS

Printed in Canada • September 2025